

Aircraft Flight Manual

*Doc. No. 92/268
2nd Edition – Rev. 0
2023, March 6th*



TECNAM P92 Echo MKII

MANUFACTURER: *Costruzioni Aeronautiche* **TECNAM S.p.A.**
AIRCRAFT MODEL: **P92 Echo MKII**

SERIAL NUMBER:

BUILD YEAR:

REGISTRATION MARKINGS:

This manual must always present on board the aircraft.

The aircraft is to be operated in compliance with information and limitations contained herein.

Costruzioni Aeronautiche **TECNAM S.p.A.**
Via Maiorise
CAPUA (CE) – Italy
Tel. +39 (0) 823.62.01.34
WEB: www.tecnam.com

Section 0

INDEX

1.	Record of Revisions.....	3
2.	List Of effective Pages.....	5
3.	Foreword.....	6
4.	Section Lists.....	7

1. RECORD OF REVISIONS

Any revision to the present Manual, except actual weighing data, is recorded: a Record of Revisions is provided at the front of this manual and the operator is advised to make sure that the record is kept up-to-date.

The Manual issue is identified by Edition and Revision codes reported on each page, lower right side.

The revision code is numerical and consists of the number "0"; subsequent revisions are identified by the change of the code from "0" to "1" for the first revision to the basic publication, "2" for the second one, etc.

Should be necessary to completely reissue a publication for contents and format changes, the Edition code will change to the next number ("2" for the second edition, "3" for the third edition etc).

Additions, deletions and revisions to existing text will be identified by a revision bar (black line) in the left-hand margin of the page, adjacent to the change.

When technical changes cause expansion or deletion of text which results in unchanged text appearing on a different page, a revision bar will be placed in the right-hand margin adjacent to the page number of all affected pages providing no other revision bar appears on the page.

These pages will be updated to the current regular revision date.

In order to be constantly updated on change on this document from TECNAM, It is the responsibility of the owner to register on TECNAM website at:

www.tecnam.com

NOTE: It is the responsibility of the owner to maintain this handbook in a current status when it is being used for operational purposes.

Rev	Revised page	Description of Revision
0	All	MTOW Increment Supplement List Updates

2. LIST OF EFFECTIVE PAGES

The List of Effective Pages (LOEP), applicable to manuals of every operator, lists all the basic AFM pages: each manual could contain either basic pages or one variant of these pages when the pages of some Supplements are embodied.

1st Edition *July 03^h 2020*
2nd Edition *March 06th 2023*

Section	Pages	Revision
Section 0	All	Rev 0
Section 1	All	Rev 0
Section 2	All	Rev 0
Section 3	All	Rev 0
Section 4	All	Rev 0
Section 5	All	Rev 0
Section 6	All	Rev 0
Section 7	All	Rev 0
Section 8	All	Rev 0
Section 9	All	Rev 0

3. FOREWORD

The P92 MKII is a twin seat, single engine light aircraft with a strut braced high wing and tricycle fixed landing gear with steerable nose wheel.

Section 1 supplies general information and it contains definitions, symbols explanations, acronyms and terminology used.

Before using the airplane, you are recommended to read carefully this manual: a deep knowledge of airplane features and limitations will allow you for operating the airplane safely.

For further information, please contact:

*COSTRUZIONI AERONAUTICHE **TECNAMS**.p.A.*

Via MAIORISE

CAPUA (CE) - ITALY

☎+39 (0)823.62.22.97 ✉ airworthiness@tecnam.com

4. SECTION LISTS

General	Section 1
Limitations	Section 2
Emergency Procedures	Section 3
Normal Procedures	Section 4
Performances	Section 5
Weight and Balance	Section 6
Airframe and Systems Description	Section 7
Ground Handling, Servicing and Maintenance	Section 8
AFM Supplements	Section 9

Intentionally left blank

Section 1 - GENERAL

INDEX

INDEX	1
1 Introduction	2
1.1 Warning – Caution – Note	2
2 Three View and Dimensions	3
2.1 Three View.....	3
2.2 Dimensions	4
3 General Features	5
3.1 Control Surfaces Travel Limits	5
3.2 Engine	5
3.3 Propeller.....	5
3.4 Fuel	6
3.5 Lubrication.....	6
3.6 Cooling	6
3.7 weights	7
3.8 Standard weights	7
3.9 Specific Loading.....	7
4 Acronyms and terminology	8
4.1 General Airspeed Terminology And Symbols	8
4.2 Meteorological terminology	9
4.3 Engine Power terminology	9
4.4 Aircraft performance and flight planning terminology	10
4.5 Weight and balance terminology	11
5 Unit conversion chart.....	12
6 Litres / US gallons conversion chart	13

1 INTRODUCTION

The Aircraft Flight Manual has been implemented to provide the owners with information for a safe and efficient use of the aircraft TECNAM P92 Echo MKII.

The **P92 Echo MkII** is a twin seat, single engine light aircraft with a strut braced high wing and tricycle fixed landing gear with steerable nose wheel.

This Flight Manual has been prepared to provide pilots and instructors with information for the safe and efficient operation of this aeroplane.

1.1 WARNING – CAUTION – NOTE

Following definitions apply to warnings, cautions and notes used in the Aircraft Flight Manual.



WARNING

The non-observation of the corresponding procedure can lead, as immediate effect, to a significant reduction of the flight safety.



CAUTION

The non-observation of the corresponding procedure can lead to an equipment damage which leads to a reduction of the flight safety in a short or longer time interval.

NOTE

Draws the attention to a procedure not directly related to safety of flight.

2 THREE VIEW AND DIMENSIONS

2.1 THREE VIEW

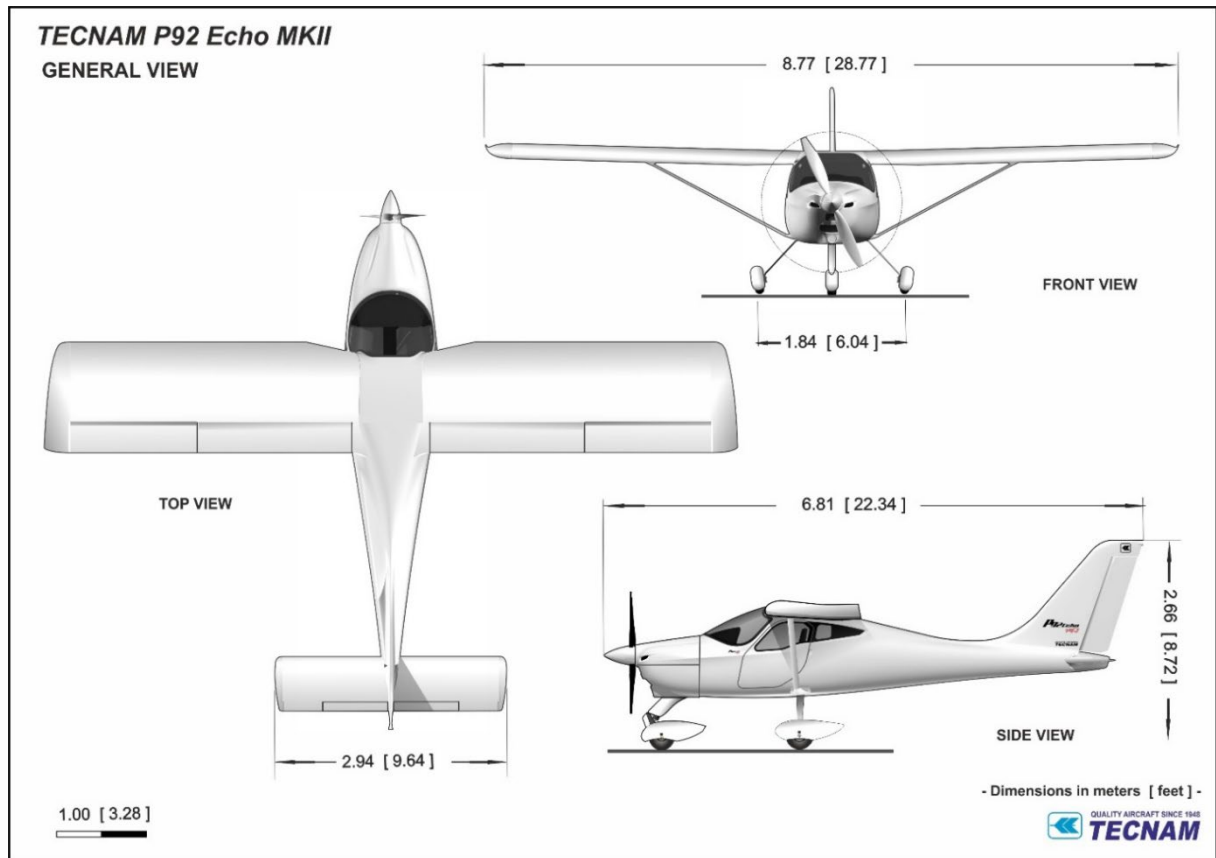


Fig. 1.1 – General views

- Dimensions shown refer to normal operating tire pressure.
- Propeller ground clearance *336 mm*
- Propeller ground clearance with deflated front tire and nose wheel shock absorber compressed *84mm*

2.2 DIMENSIONS

Overall dimensions

Wingspan	8.77 m/28.77 ft
Length	6.81 m/22.34 ft
Overall height	2.66 m/8.72 ft

Wing

Wing surface	12.1 m ² /130.24 ft ²
Mean Geometric Chord	1.40 m/4.59 ft
Dihedral	1°30'
Aspect ratio	6.35

Main Landing Gear

Wheel Track	1.84 m/6.04 ft
Wheelbase	1.74 m
Tire (Air Trac)	5.00-5

Nose Landing Gear

Tire (Air Trac)	5.00-5
-----------------	--------

3 GENERAL FEATURES

3.1 CONTROL SURFACES TRAVEL LIMITS

The control surfaces travel limits are reported in the Aircraft Maintenance Manual.

3.2 ENGINE

Manufacturer	Bombardier Rotax GmbH
Model	912 ULS2
Engine type	4 cylinder horizontally-opposed twins with overall displacement of 1352 c.c., mixed cooling, (water-cooled heads and air-cooled cylinders), twin carburetors, integrated reduction gear with torque damper.
Maximum power (at declared rpm)	73.5kW (98.5hp) @5800rpm (max.5') 69.0kW (92.5hp) @5500rpm (cont.)

3.3 PROPELLER

Manufacturer	Sensenich
Model	W68T2ET-70J
Number of blades:	2
Diameter	1730 mm (no reduction allowed)
Type	Fixed pitch – wood

3.4 FUEL

Approved fuel:	MOGAS ASTM D4814 MOGAS EN 228 Super/Super Plus (Min RON 95) AVGAS 100LL (ASTM D910) (see also Section 2)
Fuel tanks	Two wing tanks integrated within the wing's leading edge. Equipped with finger strainers outlet and with drain fittings.
Capacity of each wing tank	45 litres
Tanks overall capacity	90 litres
Overall usable fuel	86.9 litres
Overall unusable fuel	3.1 litre

3.5 LUBRICATION

Lubrication system	Forced type with external reservoir
Oil	Lubricant specifications and grade are detailed into the "Rotax Operators Manual" and in its related documents.
Oil capacity	Max. 3 litres – min. 2.0 litres(*)

(*) :In accordance with SB-912-040 R1 the minimum oil level is recommended to 2.50 liters.

3.6 COOLING

Cooling system	Mixed air and liquid pressurized closed circuit system
Coolant liquid	Coolant type and specifications are detailed into the "Rotax Operator's Manual" and in its related documents.

3.7 WEIGHTS

See Section 2.

3.8 STANDARD WEIGHTS

Empty Weight: see weighing record on Section 6.

3.9 SPECIFIC LOADING

	MTOW 472.5 kg	MTOW 600 kg*
Wing Loading	39.0 kg/m ²	49.6 kg/m ²
Power Loading	4.8 kg/hp	6.1 kg/hp

*) applicable for aircraft authorized according to DM503 10/12/2021

4 ACRONYMS AND TERMINOLOGY

4.1 GENERAL AIRSPEED TERMINOLOGY AND SYMBOLS

CAS	<u>Calibrated Airspeed</u> is the indicated airspeed, corrected taking into account the errors related to the instrument itself and its installation.
IAS	<u>Indicated Airspeed</u> is the speed shown on the airspeed indicator.
TAS	<u>True Airspeed</u> is the CAS airspeed corrected taking into account altitude and temperature.
V _A	<u>Design Manoeuvring speed</u> is the speed above the which it is not allowed to make full or abrupt control movement.
V _{FE}	<u>Maximum Flap Extended speed</u> is the highest speed permissible with flaps extended.
V _{NO}	<u>Maximum Structural Cruising Speed</u> is the speed that should not be exceeded, except in smooth air and only with caution.
V _{NE}	<u>Never Exceed Speed</u> is the speed limit that may not be exceeded at any time.
V _S	<u>Stall Speed.</u>
V _{S0}	<u>Stall Speed in landing configuration</u> (full flaps).
V _{S1}	<u>Stall speed in the given flap configuration.</u>
V _X	<u>Best Angle-of-Climb Speed</u> is the speed which allows best ramp climb performances.
V _Y	<u>Best Rate-of-Climb Speed</u> is the speed which allows the best gain in altitude over a given time.
V _R	<u>Rotation speed:</u> is the speed at which the aircraft rotates about the pitch axis during take-off

4.2 METEOROLOGICAL TERMINOLOGY

ISA	<u>International Standard Atmosphere</u> : is the air atmospheric standard condition at sea level, at 15°C (59°F) and at 1013.25hPa (29.92inHg).
QFE	<u>Official atmospheric pressure at airport level</u> : it indicates the aircraft absolute altitude with respect to the official airport level.
QNH	<u>Theoretical atmospheric pressure at sea level</u> : is the atmospheric pressure reported at the medium sea level, through the standard air pressure-altitude relationship, starting from the airport QFE.
OAT	<u>Outside Air Temperature</u> is the air static temperature expressed in degrees Celsius (°C).
T _S	<u>Standard Temperature</u> is 15°C at sea level pressure altitude and decreased by 2°C for each 1000 ft of altitude.
H _P	<u>Pressure Altitude</u> is the altitude read from an altimeter when the barometric subscale has been set to 1013 mb.

4.3 ENGINE POWER TERMINOLOGY

RPM	<u>Revolutions Per Minute</u> : is the number of revolutions per minute of the engine.
-----	--

4.4 AIRCRAFT PERFORMANCE AND FLIGHT PLANNING TERMINOLOGY

<i>Crosswind Velocity</i>	is the velocity of the crosswind component for which adequate control of the airplane during take-off and landing is assured.
<i>Usable fuel</i>	is the fuel available for flight planning.
<i>Unusable fuel</i>	is the quantity of fuel that cannot be safely used in flight.
<i>G</i>	is the acceleration of gravity.

4.5 WEIGHT AND BALANCE TERMINOLOGY

<i>Datum</i>	“Reference datum” is an imaginary vertical plane from which all horizontal distances are measured for balance purposes.
<i>Arm</i>	is the horizontal distance of an item measured from the reference datum.
<i>Moment</i>	is the product of the weight of an item multiplied by its arm.
<i>C.G.</i>	<u>Center of Gravity</u> is the point at which the airplane, or equipment, would balance if suspended. Its distance from the reference datum is found by dividing the total moment by the total weight of the aircraft.
<i>Standard Empty Weight</i>	is the weight of the aircraft with engine fluids and oil at operating levels.
<i>Basic Empty Weight</i>	is the standard empty weight to which it is added the optional equipment weight.
<i>Useful Load</i>	is the difference between maximum take-off weight and the basic empty weight.
<i>Maximum Take-off Weight</i>	is the maximum weight approved to perform the take-off.
<i>Maximum Landing Weight</i>	is the maximum weight approved for the landing touchdown (for P92 Echo MKII it is equivalent to the Maximum Takeoff Weight).
<i>Tare</i>	is the weight of chocks, blocks, stands, etc. used when weighing an airplane, and is included in the scale readings. Tare is deducted from the scale reading to obtain the actual (net) airplane weight.

5 UNIT CONVERSION CHART

<i>MULTIPLYING</i>		<i>BY →</i>	<i>YIELDS</i>	
TEMPERATURE				
Fahrenheit	[°F]	$\frac{5}{9} \cdot (F - 32)$	Celsius	[°C]
Celsius	[°C]	$\left(\frac{9}{5} \cdot C\right) + 32$	Fahrenheit	[°F]
FORCES				
Kilograms	[kg]	2.205	Pounds	[lbs]
Pounds	[lbs]	0.4536	Kilograms	[kg]
SPEED				
Meters per second	[m/s]	196.86	Feet per minute	[ft/min]
Feet per minute	[ft/min]	0.00508	Meters per second	[m/s]
Knots	[kts]	1.853	Kilometres / hour	[km/h]
Kilometres / hour	[km/h]	0.5396	Knots	[kts]
PRESSURE				
Atmosphere	[atm]	14.7	Pounds / sq. in	[psi]
Pounds / sq. in	[psi]	0.068	Atmosphere	[atm]
LENGTH				
Kilometres	[km]	0.5396	Nautical miles	[nm]
Nautical miles	[nm]	1.852	Kilometres	[km]
Meters	[m]	3.281	Feet	[ft]
Feet	[ft]	0.3048	Meters	[m]
Centimetres	[cm]	0.3937	Inches	[in]
Inches	[in]	2.540	Centimetres	[cm]
VOLUME				
Litres	[l]	0.2642	U.S. Gallons	[US Gal]
U.S. Gallons	[US Gal]	3.785	Litres	[l]
AREA				
Square meters	[m²]	10.76	Square feet	[sq ft]
Square feet	[sq ft]	0.0929	Square meters	[m²]

6 LITRES / US GALLONS CONVERSION CHART

Litres	US Gallons
5	1.3
10	2.6
15	4.0
20	5.3
25	6.6
30	7.9
35	9.2
40	10.6
45	11.9
50	13.2
60	15.9
70	18.5
80	21.1
90	23.8

US Gallons	Litres
1	3.8
2	7.6
3	11.4
4	15.1
6	22.7
8	30.3
10	37.9
12	45.4
14	53.0
16	60.6
18	68.1
20	75.7
22	83.3
24	90.9

INTENTIONALLY LEFT BLANK

Section 2 – LIMITATIONS

INDEX

INDEX	1
1. Introduction	2
2. Speed limitations.....	3
3. Airspeed indicator markings.....	4
4. Powerplant limitations	5
5. Lubricant.....	6
6. Coolant Liquid.....	6
7. Propeller.....	7
8. Maximum operating altitude	8
9. Ambient Temperature	8
10. Powerplant instruments markings	9
11. Other Instruments Markings	9
12. Weights	10
13. Center of gravity range	10
14. Approved maneuvers.....	11
15. Maneuvers load factor limits	11
16. Fuel	12

1. INTRODUCTION

Section 2 includes operating limitations and instrument markings of *P92 Echo MKII* aircraft, its engines and standard systems and equipment.

2. SPEED LIMITATIONS

The following tables addresses the airspeed limitations and their operational significance:

SPEED (MTOW 472.5 kg)		IAS [km/h]	IAS [kts]	REMARKS
V _{NE}	Never exceed speed	260	140	Never exceed this speed in any operation.
V _{NO}	Maximum Structural Cruising Speed	200	108	Never exceed this speed unless in smooth air, and then only with caution.
V _A	Maneuvering speed	150	81	Do not make full or abrupt control movements above this speed as this may cause stress in excess of limit load factor
V _{FE}	Maximum flap extended speed	110	59	Never exceed this speed for any given flap setting.

SPEED (MTOW 600 kg)*		IAS [km/h]	IAS [kts]	REMARKS
V _{NE}	Never exceed speed	269	145	Never exceed this speed in any operation.
V _{NO}	Maximum Structural Cruising Speed	209	113	Never exceed this speed unless in smooth air, and then only with caution.
V _A	Maneuvering speed	181	98	Do not make full or abrupt control movements above this speed as this may cause stress in excess of limit load factor
V _{FE}	Maximum flap extended speed	130	70	Never exceed this speed for any given flap setting.

*) applicable for aircraft authorized according to DM 503 10/12/2021

3. AIRSPEED INDICATOR MARKINGS

Airspeed indicator markings and their colour code are explained in the following tables.

MARKING (MTOW 472.5 kg)	IAS [km/h]	IAS [kts]	EXPLANATION
White arc	72-110	39-59	Positive Flap Operating Range (lower limit is $1.1V_{SO}$, at specified maximum weight and upper limit is the maximum speed permissible with landing flaps extension).
Green arc	81-200	44-108	Normal Operating Range (lower limit is $1.1V_{S1}$ at specified maximum weight and most forward c.g. with flaps retracted and upper limit is maximum structural speed V_{NO}).
Yellow arc	200-260	108-140	Manoeuvres must be conducted with caution and only in smooth air.
Red line	260	140	Maximum speed for all operations.
Blue flag	150	81	Maneuvering speed

MARKING* (MTOW 600 kg)	IAS [km/h]	IAS [kts]	EXPLANATION
White arc	76-130	41-70	Positive Flap Operating Range (lower limit is $1.1V_{SO}$, at specified maximum weight and upper limit is the maximum speed permissible with landing flaps extension).
Green arc	94-209	51-113	Normal Operating Range (lower limit is $1.1V_{S1}$ at specified maximum weight and most forward c.g. with flaps retracted and upper limit is maximum structural speed V_{NO}).
Yellow arc	209-269	113-145	Manoeuvres must be conducted with caution and only in smooth air.
Red line	269	145	Maximum speed for all operations.
Blue flag	181	98	Maneuvering speed

*) applicable for aircraft authorized according to DM 503 10/12/2021

4. POWERPLANT LIMITATIONS

Following table reports the operating limitations for aircraft engine installed:

ENGINE MANUFACTURER: Bombardier Rotax GmbH.

ENGINE MODEL: 912 ULS2

MAXIMUM POWER:

	Max Power kW (<i>hp</i>)	Max RPM. Prop. RPM (<i>engine</i>)	Time max. (minutes)
Max. T.O.	73.5 (98.5)	2388 (5800)	5
Max. Cont.	69 (92.5)	2265 (5500)	-

NOTE

With full throttle, at fixed point in no wind conditions, the maximum propeller's RPM should be 2100 ± 100 .

Temperatures:

Max CHT*	135°C
Max CT:	120°C
Min/Max Oil:	50 °C / 130 °C
Oil normal operating range (approx.):	90 °C / 110 °C

* *applicable for Engines up to serial no. 4924543(included) and repaired engine which doesn't change the cylinder head n°3 with new one (part no. 413195)*

Oil Pressure:

Minimum:	0.8 Bar / 12 psi
Normal:	2-5 Bar / 29-73 psi
Maximum:	7 Bar / 102 psi

Engine starting: allowable temperature range

OAT Min	-25° C
OAT Max	+50° C



WARNING

In event of cold starting operation, it is permitted a maximum oil pressure of 7 bar for a short period.


Fuel pressure:

Minimum:	2.2 psi (0.15 Bar)
Normal:	5.8 psi (0.40 Bar) or 7.26 psi* (0.5 Bar)

* only applicable for fuel pump part no. 893110, 893114 and 893115

5. LUBRICANT

Use viscosity grade oil as specified in the following table:

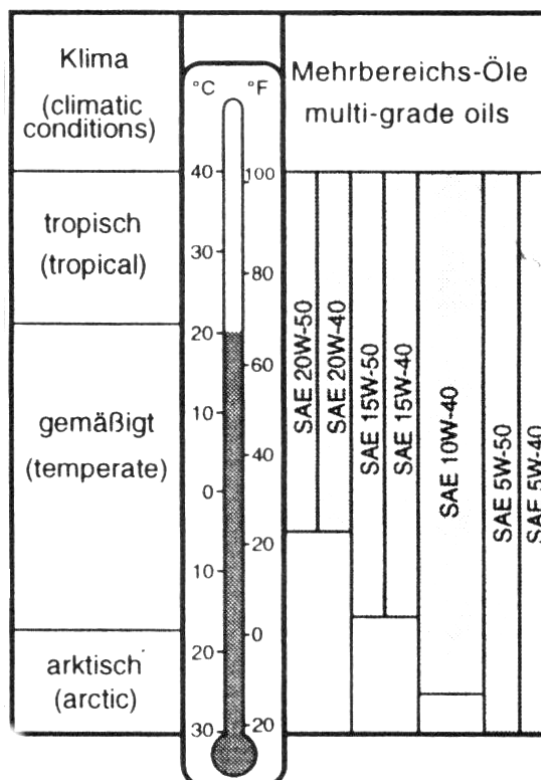

6. COOLANT LIQUID

Coolant type and specifications are detailed into the “Rotax Operator’s Manual” and in its related documents.

7. PROPELLER

MANUFACTURER:	Sensenich Propeller
MODEL:	W68T2ET-70J
TYPE:	Wood twin blade fixed pitch
DIAMETER:	1730 mm (no reduction permitted)

8. MAXIMUM OPERATING ALTITUDE

Maximum operating altitude is 14000 ft (4260 m) MSL.



CAUTION

Flight crew is required to use supplemental oxygen according to Air Operation Rules.

9. AMBIENT TEMPERATURE

Ambient temperature: from -25°C to +50°C.



WARNING

Flight in expected and/or known icing conditions is forbidden.

10. POWERPLANT INSTRUMENTS MARKINGS

Powerplant instrument markings and their colour code significance are shown below:

INSTRUMENT		RED RANGE Minimum limit	GREEN RANGE Normal operating	YELLOW RANGE Caution	RED RANGE Maximum limit
Propeller	RPM	----	580 - 2265	2265 - 2388	>2388
Engine	RPM	----	1410- 5500	5500-5800	>5800
Oil temp.	°C	<50	90 - 110	50 - 90 110 - 130	>130
CT	°C	---	0 - 120	---	>120
CHT ⁽¹⁾	°C	---	0 - 135	---	>135
Oil pressure	bar	<0.8	2 - 5	0.8 - 2 5 - 7 ⁽²⁾	7
Fuel press.	psi	<2.2	2.2-5.8 or 7.26 ⁽³⁾	----	5.8 or 7.26 ⁽³⁾
	bar	<0.15	0.15-0.4 or 0.5 ⁽⁴⁾	----	0.4 or 0.5 ⁽³⁾
Fuel Q.ty	litres	<0 ⁽⁵⁾	----	----	----

11. OTHER INSTRUMENTS MARKINGS

INSTRUMENT	RED RANGE Minimum limit	GREEN RANGE Normal operating	YELLOW RANGE Caution	RED RANGE Maximum limit
Voltmeter	<10.5 Volt	12 - 14 Volt	----	----

¹ - Applicable for Engines up to serial no. 494543 (included) and repaired engine which doesn't change the cylinder head n°3 with new one (part no. 413195)

² - In event of cold starting operation, it is permitted a maximum oil pressure of 7 bar for a short period.

³ - when fuel pump part no. 893110, 893114 and 893115 is installed

⁴ - when fuel pump part no. 893110, 893114 and 893115 is installed

⁵ - "0" indication shows the unusable fuel quantity (1.55 litres)

12. WEIGHTS

Condition	Weight
Maximum take-off weight	472.5 kg
Maximum take-off weight*	600 kg*

*) applicable for aircraft authorized according to DM 503 10/12/2021

13. CENTER OF GRAVITY RANGE

Forward limit	19% MAC
Aft limit	30% MAC
Datum	Propeller support flange w/o spacer
Bubble Level	Cabin floor



The pilot is responsible for ensuring that the airplane is properly loaded. Refer to Section 6 for appropriate instructions.

14. APPROVED MANEUVERS

The aircraft is intended for non-aerobatic operations only.

Non aerobatic operations include:

- Any manoeuvre pertaining to “normal” flight
- Stalls (except whip stalls)
- Lazy eights
- Chandelles
- Turns in which the angle of bank is not more than 60°



WARNING

Aerobatic manoeuvres, including spins and turns with angle of bank of more than 60°, are not approved for such a category.



WARNING

Limit load factor could be exceeded by moving abruptly flight controls at their end run at a speed above V_A .

15. MANEUVERS LOAD FACTOR LIMITS

Maneuver load factors limits are as follows:

Positive	Negative
+ 4.0 g	- 2.0 g

Maneuver load factors limits with flaps extended are as follows:

Positive	Negative
+ 2.0 g	0 g



CAUTION

Prolonged use of Aviation Fuel Avgas 100LL results in greater wear of valve seats and greater combustion deposits inside cylinders due to higher lead content. Make reference to Rotax Maintenance Manual which prescribes dedicated checks due to the prolonged use of Avgas.

16. FUEL

TWO TANKS:	<i>45 liters each</i>
TOTAL FUEL CAPACITY:	<i>90 liters.</i>
USABLE FUEL Q.TY:	<i>86.9 liters</i>
UNUSABLE FUEL Q.TY:	<i>1.55 liters each (3.1 litres total)</i>

Compensate uneven fuel tank levels by acting on the fuel selector valve located into the cabin.

APPROVED FUEL:

- ✓ MOGAS ASTM D4814
- ✓ MOGAS EN 228 Super/Super plus (min. RON 95)
- ✓ AVGAS 100 LL (ASTM D910)

Section 3–EMERGENCY PROCEDURES

INDEX

INDEX	1
1. Introduction	3
2. Airplane alerts	4
2.1. Electric Power System Malfunction	4
2.2. Electrical fuel pump Failure	5
2.3. Trim System Failure	5
2.4. Airplane evacuation.....	5
3. Engine securing	6
4. Engine Failure.....	7
4.1. Engine Failure During Take-Off Run	7
4.2. Engine Failure Immediately After Take-off	7
4.3. Engine Failures During Flight	8
4.3.1 Low Fuel Pressure	8
4.3.2 Oil Pressure limits exceedance	8
4.3.3 High Oil Temperature.....	9
4.3.4 CHT/CT limit exceedance	10
5. In-Flight Engine Restart	11
6. Smoke And Fire	12
6.1. Engine fire on the ground	12
6.2. Engine Fire During Take-off.....	12
6.3. Engine Fire In-Flight	13
6.4. Cabin Fire / Electrical smoke in cabin during flight	13
6.5. Electrical smoke/fire in cabin on the ground	13
7. Landing Emergency.....	14
7.1. Forced Landing Without Engine Power	14
7.2. Power-On Forced Landing	14
8. Stall Recovery	15
9. Recovery From Unintentional Spin.....	16
10. Rescue System deployment.....	17
11. Other Emergencies.....	18
11.1. Unintentional Flight Into Icing Conditions	18

1. INTRODUCTION

Section 3 includes checklists and detailed procedures to be used in the event of emergencies. Emergencies caused by a malfunction of the aircraft or engine are extremely rare if appropriate maintenance and pre-flight inspections are carried out.

Before operating the aircraft, the pilot should become thoroughly familiar with the present manual and, in particular, with the present section. Further, a continued and appropriate training and self-study should be done.

In case of emergency the pilot should act as follows:

1. *Keep control of the aeroplane*
2. *Analyse the situation*
3. *Apply the pertinent procedure*
4. *Inform the Air Traffic Control if time and conditions allow.*

Two types of emergency procedures are hereby given:

- a. “Bold faces” which must be known by heart and executed in the correct and complete sequence, as soon as possible as the failure is detected and recognized;

These procedures characters are boxed and highlighted, an example is shown below:

<u>BEFORE ROTATION: ABORT TAKE OFF</u>	
1. Throttle	<i>IDLE</i>
2. Rudder	<i>Keep heading control</i>
3. --	
4. --	

- b. Other procedures which should be well theoretically known and mastered, but that are not time critical and can be executed entering and following step by step the AFM appropriate checklist.

NOTE

In this Chapter, following definitions apply:

Land as soon as possible: land without delay at the nearest suitable area at which a safe approach and landing is assured.

Land as soon as practical: land at the nearest approved landing area where suitable repairs can be made.

2. AIRPLANE ALERTS

2.1. ELECTRIC POWER SYSTEM MALFUNCTION

Generator message alert

NOTE

Generator message alert (*ALT*) may appear on PFD for a faulty alternator or when voltage is above 16V, in this case the over-voltage sensor automatically shuts down the alternator

- | | |
|----------------------|------------|
| 1. Generator switch: | <i>OFF</i> |
| 2. Master switch: | <i>OFF</i> |
| 3. Generator switch: | <i>ON</i> |
| 4. Master switch: | <i>ON</i> |

If the problem persists

- | | |
|----------------------------------|-------------|
| 5. Generator switch: | <i>OFF</i> |
| 6. Non-vital electric equipment: | <i>Shed</i> |

2.2. ELECTRICAL FUEL PUMP FAILURE

1. Electrical fuel pump switch: *OFF*
2. Electrical fuel pump switch: *ON*
3. Fuel pressure: *CHECK raise*

If fuel pressure doesn't build up:

4. **Land as soon as possible** monitoring fuel pressure.

2.3. TRIM SYSTEM FAILURE

Locked Control

Should trim control be inoperative, act as follows:

1. Breakers: *CHECK*
2. Trim switch LH/RH: *CHECK for correct position*
3. Speed: *adjust to control aircraft without excessive stick force*
4. **Land aircraft as soon as possible.**

Runaway

In event of trim runaway, act as follows:

1. Pull TRIM Breaker as soon as possible
2. Speed: *adjust to control aircraft without excessive stick force*
3. **Land aircraft as soon as possible.**

2.4. AIRPLANE EVACUATION

With the engine secured and propeller stopped (if practical):

1. **Parking brake:** *ON*
2. **Seat belts:** *unstrap completely*
3. **Headphones:** *REMOVE*
4. **Door:** *OPEN*
5. **If door is locked or doesn't open:** *break using the hammer (if available)*
6. *Escape away from flames/ hot engine compartment/ spilling fuel tanks.*

3. ENGINE SECURING

Following procedure is applicable to shut-down the engine in flight:

- | | |
|-------------------------|--------------------|
| 1. Throttle Lever | <i>IDLE</i> |
| 2. Magnetos | <i>OFF</i> |
| 3. Fuel Selector | <i>OFF</i> |
| 4. Electrical fuel pump | <i>OFF</i> |
| 5. Generator switch | <i>OFF</i> |

4. ENGINE FAILURE

4.1. ENGINE FAILURE DURING TAKE-OFF RUN

- | | |
|--------------|-----------------------------|
| 1. Throttle: | <i>IDLE (fully out)</i> |
| 2. Rudder | <i>Keep heading control</i> |
| 3. Brakes: | <i>apply as needed</i> |

When safely stopped:

- | | |
|---------------------------------|------------|
| 4. Magnetos: | <i>OFF</i> |
| 5. Fuel selector valve: | <i>OFF</i> |
| 6. Electric fuel pump: | <i>OFF</i> |
| 7. Generator & Master switches: | <i>OFF</i> |

4.2. ENGINE FAILURE IMMEDIATELY AFTER TAKE-OFF

1. Find a suitable place to land safely.
2. Flaps: as needed



WARNING

The immediate landing should be planned straight ahead with only small changes in directions not exceeding 45° to the left and 45° to the right.

- | | |
|-----------|------------------|
| 3. Flaps: | <i>as needed</i> |
|-----------|------------------|



WARNING

Stall speed increases with bank angle and longitudinal load factor. Acoustic stall warning will in any case provide a correct anticipated clue of incipient stall.

At, or right before touch down

- | | |
|---------------------------------|-------------|
| 4. Throttle: | <i>IDLE</i> |
| 5. Magnetos: | <i>OFF</i> |
| 6. Fuel selector valve: | <i>OFF</i> |
| 7. Electric fuel pump: | <i>OFF</i> |
| 8. Generator & Master switches: | <i>OFF</i> |



WARNING

A single engine aircraft take off should always be preceded by a thorough take off emergency pilot self-briefing. Decision to try an engine emergency restart right after take-off should be taken only if environmental situation requires it: pilot shall never ignore the priority of attentively follow an immediate emergency landing.

After possible mechanical engine seizure, fire or a major propeller damage, engine restart attempt is not recommended.

4.3. ENGINE FAILURES DURING FLIGHT

4.3.1 Low Fuel Pressure

If the fuel pressure indicator falls below the **2.2 psi (0.15 bar)**:

1. Electric fuel pump: *ON*
2. Fuel selector valve: *change the fuel feeding tank*
3. Check both fuel quantity indicators

If fuel pressure doesn't build up:

4. **Land as soon as possible** monitoring fuel pressure.

If engine stops:

5. **Land as soon as possible** applying forced landing procedure (See Para. 7)

4.3.2 Oil Pressure limits exceedance

If oil pressure exceeds upper limit (7 bar):

1. Throttle Lever *REDUCE engine power as practical*
2. OIL PRESS and OIL TEMP *CHECK within limits*
3. **Land as soon as practical**

If oil pressure is under the lower limit (0.8 bar):

1. Throttle Lever *REDUCE Minimum practical*
2. **Land as soon as practical**

If oil pressure continues to decrease:

3. **Land as soon as possible** applying forced landing procedure (See Para. 7)

4.3.3 High Oil Temperature

If oil pressure is low see para. 4.3.2 Low Oil Pressure.

If oil pressure is within limits:

1. Throttle Lever *REDUCE Minimum practical*

If oil temperature does not decrease

2. Airspeed *INCREASE*

NOTE

If oil temperature does not come back within limits, the thermostatic valve (if embodied), regulating the oil flow to the heat exchangers, could be damaged or an oil leakage can be present in the oil supply line.

3. **Land as soon as practical**

If engine roughness, vibrations, erratic behaviour, or high CHT /CT is detected:

4. **Land as soon as possible** applying forced landing procedure (See Para. 7)

4.3.4 CHT/CT limit exceedance

If CHT is above 135°C or CT is above 120 °C:

1. Throttle Lever *REDUCE Minimum practical*
2. **Land as soon as practical**

If CHT/CT continues to rise and engine shows roughness or power loss:

3. **Land as soon as possible** applying forced landing procedure (See Para. 7)

5. IN-FLIGHT ENGINE RESTART



After a mechanical engine seizure, fire or a major propeller damage engine restart is not recommended.

- | | |
|----------------------------|-------------------------------------|
| 1. Electrical fuel pump | <i>ON</i> |
| 2. Fuel quantity indicator | <i>CHECK</i> |
| 3. Fuel Selector | <i>change the fuel feeding tank</i> |
| 4. Magnetos | <i>BOTH</i> |
| 5. Magnetos | <i>START</i> |
| 6. Throttle lever | <i>SET as required</i> |



After engine restart, if practical, moderate propeller RPM and throttle increase to allow OIL and CHT/CT temperatures for stabilizing in the green arcs.

NOTE

If the fuel quantity in the tank which feeds the stopped engine is low, select the opposite side fuel tank by means of the fuel selector.

In case of unsuccessful engine restart:

1. Engine *SECURE (see engine securing procedure on Para. 3)*
2. **Land as soon as possible** applying forced landing procedure (See Para. 7)

6. SMOKE AND FIRE

6.1. ENGINE FIRE ON THE GROUND

- | | |
|--------------------------------|------------------------------|
| 1. Fuel Selector | <i>OFF</i> |
| 2. Electrical fuel pump | <i>OFF</i> |
| 3. Magnetos | <i>OFF</i> |
| 4. Throttle lever | <i>FULL POWER</i> |
| 5. Cabin Heat | <i>OFF</i> |
| 6. Generator & Master Switches | <i>OFF</i> |
| 7. Parking Brake | <i>ENGAGED</i> |
| 8. Aircraft Evacuation | <i>carry out immediately</i> |

6.2. ENGINE FIRE DURING TAKE-OFF

BEFORE ROTATION: ABORT TAKE OFF

- | | |
|-------------------|-----------------------------|
| 1. Throttle Lever | <i>IDLE</i> |
| 2. Rudder | <i>Keep heading control</i> |
| 3. Brakes | <i>As required</i> |

With aircraft under control

- | | |
|--------------------------------|------------------------------|
| 4. Fuel Selector | <i>OFF</i> |
| 5. Electrical fuel pump | <i>OFF</i> |
| 6. Magnetos | <i>OFF</i> |
| 7. Cabin Heat | <i>OFF</i> |
| 8. Generator & Master Switches | <i>OFF</i> |
| 9. Parking Brake | <i>ENGAGED</i> |
| 10. Aircraft Evacuation | <i>carry out immediately</i> |

6.3. ENGINE FIRE IN-FLIGHT

1. Cabin heating: *OFF*
2. Fuel selector valve: *OFF*
3. Electric fuel pump: *OFF*
4. Throttle: *FULL FORWARD until the engine stops*
5. Magnetos: *OFF*
6. Cabin vents: *OPEN*

**WARNING***Do not attempt engine restart*

7. Land as soon as possible applying forced landing procedure (See Para. 7).

6.4. CABIN FIRE / ELECTRICAL SMOKE IN CABIN DURING FLIGHT

1. Cabin heating: *OFF*
2. Cabin vents: *OPEN*
3. Door: *OPEN, if necessary*
4. Try to choke the fire. Direct the fire extinguisher (if on board) towards flame base

If smoke persists:

1. Generator & Master switches: *OFF*
2. Land as soon as possible and evacuate the aircraft

**CAUTION***If the MASTER SWITCH is set to OFF, consider that flaps extension and pitch trim operation would be not possible.***6.5. ELECTRICAL SMOKE/FIRE IN CABIN ON THE GROUND**

1. Generator Switch: *OFF*
2. Throttle Lever: *IDLE*
3. Magnetos: *OFF*
4. Fuel Selector Valve: *OFF*
5. MASTER SWITCH: *OFF*
6. Aircraft Evacuation *carry out immediately*

7. LANDING EMERGENCY

7.1. FORCED LANDING WITHOUT ENGINE POWER

1. Flap: UP
2. Airspeed (Best glide speed): 65 kts IAS
3. Find a suitable place to land safely, plan to approach it upwind.
4. Fuel selector valve: OFF
5. Electric fuel pump: OFF
6. Magnetos: OFF
7. Safety belts: Tighten

When certain to land

8. Flaps: *as necessary*
9. Generator and Master switches: OFF.

NOTE

Glide ratio is about 10.2 therefore in zero wind conditions every 1000ft Above Ground Level it is possible to cover about 1.5 NM (about 3 km).

7.2. POWER-ON FORCED LANDING

1. Airspeed (Best glide speed): 65 kts IAS
2. Flaps: UP
3. Locate the most suitable terrain for emergency landing, plan to approach it upwind.
4. Safety belts: Tighten
5. Canopy locks: CHECK LOCKED

When certain to land, right before touch down

6. Flaps: *as necessary*
7. Fuel selector valve: OFF
8. Electric fuel pump: OFF
9. Magnetos: OFF
10. Generator and Master switches: OFF

8. STALL RECOVERY

At the first indication of stall, for example, uncontrolled lateral departure, pitch down, stall warning:

- | | |
|--------------------------------------|---|
| 1. Pitch nose down: | <i>APPLY until impending stall indications are eliminated</i> |
| 2. Wings level | <i>Obtain and Maintain</i> |
| 3. Power: | <i>As required</i> |
| 4. Return to the desired flight path | |



CAUTION

Apply smooth and coordinated flight control movements to return the airplane to the desired flight path being careful to avoid a secondary stall.

9. RECOVERY FROM UNINTENTIONAL SPIN

If unintentional spin occurs, the following recovery procedure should be used:

1. **Throttle:** *IDLE*
2. **Flaps:** *UP*
3. **Rudder:** *full, in the opposite direction of the spin*
4. **Stick:** *forward*

As the spin stops:

5. **Rudder:** *SET NEUTRAL*
6. **Aeroplane attitude:** *smoothly recover averting speeds in excess of V_{NE} and maximum load factor ($n=+4.0$)*
7. **Throttle:** *Readjust to restore engine power.*



WARNING

Keep full rudder against rotation until spin has stopped.

10. RESCUE SYSTEM DEPLOYMENT

Rescue system should be deployed in the event of a life-threatening emergency where parachute activation is determined to be safer than continued flight and landing.



CAUTION

Full deployment of parachute is achieved in about 4 seconds.

Rescue system should only be activated when any other means of handling the emergency would not protect the occupants from serious injury.



CAUTION

Successful deployment depends on aircraft attitude and air-speed: greater deployment altitude yields better chances for successful deployment

Shown below the procedure to be followed:

1. Airspeed	MINUM POSSIBLE (max speed 140 kts IAS)
2. Pull activation handle firmly and to end-travel	
<i>After deployment</i>	
3. Fuel selector:	OFF
4. Magnetos:	OFF
5. Master Switch:	OFF
6. Seat Belts and Harnesses:	TIGHTEN
<i>Before impact</i>	
7. Assume emergency landing body position	
<i>The emergency landing body position is assumed by placing both hands on the lap, clasping one wrist with the opposite hand, and holding the upper torso erect and against the seat backs.</i>	
8. After the airplane comes to a complete stop, evacuate quickly and move upwind	

11. OTHER EMERGENCIES

11.1. UNINTENTIONAL FLIGHT INTO ICING CONDITIONS



WARNING

Carburettor ice is possible when flying at low engine rpm in visible moisture (outside visibility less than 5 km, vicinity of fog, mist, clouds, rain, snow or hail) and OAT less than 10°C.

1. Immediately fly away from icing conditions (changing altitude and direction of flight, out of clouds, visible moisture, precipitations)
2. Controls surfaces: *continue to move to maintain their movability*
3. Engine: *increase rpm.*



WARNING

In case of ice formation on wing leading edge, stall speed would increase.

Section 4 – NORMAL PROCEDURES

INDEX

INDEX	1
1. Introduction	2
2. Pre-Flight Inspections	3
2.1. Cabin Inspection	3
2.2. Aircraft walk-around	3
3. Checklists	6
3.1. Before Engine Starting (After Pre-flight Inspection)	6
3.2. Engine Starting	7
3.3. Before Taxiing	7
3.4. Taxiing	8
3.5. Prior To Take-Off	8
3.6. Take-off And Climb	9
3.7. Cruise	10
3.8. Before Landing	10
3.9. Balked Landing	10
3.10. After Landing	11
3.11. Engine Shut Down	11
3.12. Postflight Check	11

1. INTRODUCTION

Section 4 contains checklists and the procedures for the conduction of normal operation.

2. PRE-FLIGHT INSPECTIONS

Before each flight, it is necessary to carry out a complete aircraft check comprising an external inspection followed by a cockpit inspection as below detailed.

2.1. CABIN INSPECTION

- A Weight and balance: *calculate (ref. this AFM sect. 6) check within limits*
- B Safety belts: *connected to hard points, check condition*
- C Magnetos: *OFF, keys extracted*
- D Master switch: *ON*
- E Voltmeter: *check (10-12 V); Ammeter check (red).*
- F Lights (if installed): *all ON, check operation*
- G Acoustic stall warning: *check operation*
- H Master switch: *OFF*
- I Baggage: *check ELT, luggage stowage and fastened with restraint net.*

2.2. AIRCRAFT WALK-AROUND

To perform the aircraft walk-around, carry out the checklist according to the station shown in Figure 4-1.



Visual inspection is defined as follows: check for defects, cracks, detachments, excessive play, unsafe or improper installation as well as for general condition. For control surfaces, visual inspection also involves additional check for freedom of movement and security. Red lubber lines on bolts and nuts shall be intact.



Fuel level indicated by the avionics system indication should be verified by visual check of actual fuel quantity embarked in the tanks.



Fuel drainage operation must be carried out with the aircraft parked on a level surface. Set Cockpit Fuel Selector Valve to open prior to drain fuel circuit nose section valve.

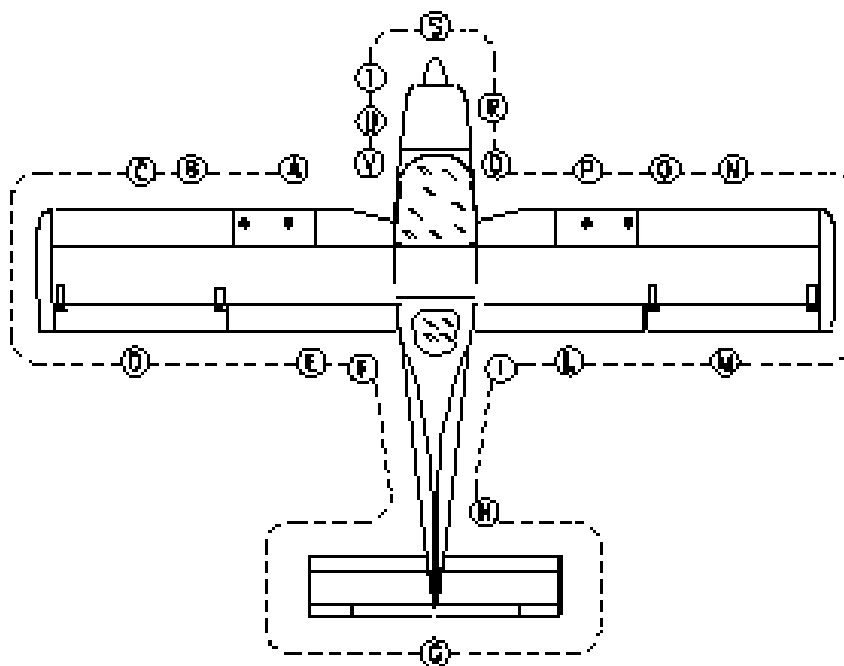


FIG. 4-1

- A Left hand fuel filler cap: check visually for desired fuel level and secure. Left tank vent: check for obstructions.
- B Remove protection cap and check pitot mounted on left strut is unobstructed, do not blow inside vents, place protection cap inside aircraft.
- C Left side leading edge and wing skin: visual inspection
- D Left aileron: visual inspection
- E Left flap and hinges: visual inspection
- F Left main landing gear; check inflation 14 psi (1.0 bar), tire condition, alignment, fuselage skin condition.
- G Horizontal tail and tab: visual inspection.
- H Vertical tail and rudder: visual inspection.
- I Right side main landing gear; check inflation 14 psi (1.0 bar), tire condition, alignment, fuselage skin condition.
- L Right flap and hinges: visual inspection.
- M Right aileron: visual inspection.
- N Right leading edge and wing skin: visual inspection.
- O Check freedom of movement of stall detector micro-switch on right side leading edge, activate Master switch and check cabin acoustic warning signal is operative, deactivate Master switch.
- P Right side fuel filler cap: check visually for desired fuel level and secure. Right side tank vent: check for obstructions.
- Q Right side static port: check for obstructions, do not blow inside vents (read note).

- R Nose wheel strut and tire: check inflation 11 psi (0.8 bar), tire condition and condition of rubber shock absorber discs.
- S Propeller and spinner condition: check for nicks and security.
- T Open engine cowling and perform the following checklist:
 - I. Check no foreign objects are present.
 - II. Check the cooling circuit for losses, check coolant reservoir level, insure radiator honeycomb is unobstructed.
 - III. Check lubrication circuit for losses, check oil reservoir level, insure radiator honeycomb is unobstructed.
 - IV. Open both fuel shutoff valves, inspect fuel circuit for losses, check integrity of fireproof protection braids, drain circuit using a cup to collect fuel by opening the specific drainage valve located on the firewall, close shutoff fuel valves. Check for water or other contaminants.
- U Nose wheel strut and tire: check tire condition and condition of rubber shock absorber discs.
- V Left side static port: check for obstructions, do not blow inside vents (read note).

NOTE

Avoid blowing inside Pitot-tube and inside airspeed indicator system's static vents as this may damage instruments.

3. CHECKLISTS

3.1. BEFORE ENGINE STARTING (AFTER PRE-FLIGHT INSPECTION)

1. Seat position and safety belts adjustment
2. Flight controls: *operate until their stop checking for movement smoothness, free of play and friction.*
3. Parking brake: *engage and brake pedal press/brake lever pull*
4. Throttle friction: *adjust*
5. Circuit Breakers: *check all IN*
6. Master switch: *ON, Check Voltage (at least 10.5 V)*
7. Electric fuel pump: *ON, (check for audible pump noise and fuel pressure build up)*
8. Electric fuel pump: *OFF*
9. Avionic Master switch: *ON, instruments check, then set in OFF*
10. Flap control: *cycle fully extended and then set T/O*
11. Pitch Trim: *cycle fully up and down, from both left and right controls*
12. Pitch trim: *set neutral*



WARNING

Pitch trim other than in neutral position would affect take off performance and take off rotation execution at the correct V_R IAS.

13. Nav. light & Strobe light (if installed): *ON*
14. Fuel quantity: *compare the fuel indication of avionic system with fuel quantity visually checked into the tanks (see Pre-flight inspection – External inspection)*

NOTE

In absence of RH seat occupant: fasten seat belts around the seat so as to prevent any interference with the aeroplane flight control operation and with rapid egress in an emergency.

15. Doors: *Closed and locked*

3.2. ENGINE STARTING

1. Master switch ON.
2. Engine throttle: *idle*
3. Choke: *as needed*
4. Fuel selector valve: *select the tank with less fuel*
5. Electric fuel pump: *ON*
6. Propeller area: *call for CLEAR and visually check*



WARNING

Check to insure no person or object is present in the area close to the propeller. Forward lower sector visibility is not possible from inside the cockpit.

7. Magnetos: *BOTH*
8. Magnetos: *START*
9. Check oil pressure rise within 10 sec. (maximum cold value 7 bar)
10. Generator switch “ON”
11. Check *ALT* message disappears.
12. Voltmeter: check more than 14V
13. Engine parameters: Check
14. Choke: *OFF*
15. Throttle lever: *2430-2915 rpm*
16. Electric fuel pump: *OFF*
17. Check fuel pressure (min 2.2 psi)

3.3. BEFORE TAXIING

1. Radio and Avionics: *ON*
2. Altimeter: *set*
3. Direction indicator: *set in accordance with the magnetic compass*
4. Parking brake: *OFF and taxi*

3.4. TAXIING

1. Brakes: *check*
2. Steering: *check*
3. Flight parameters: *check operation*

3.5. PRIOR TO TAKE-OFF

1. Parking brake: *ON, brake pedal press / brake lever pull*
2. Engine parameters: *Check within limits*
 - Oil pressure: 2-5 bar (*above 3400 rpm*); 0.8 bar (*below 3400 rpm*)
3. Ammeter check: *“green”*.
4. Electric Fuel pump: *ON*
5. Fuel valve: *select the fullest tank*
6. Fuel pressure: *check*
7. Throttle lever: *advance to 4000 rpm*
 - a. Ignition magnetos test: *select LEFT, check RPM drop within 315 rpm;*
 - b. Select BOTH: *check propeller speed 4000 rpm;*
 - c. Select RIGHT: *check RPM drop within 315 rpm;*
 - d. *Maximum difference of speed between LEFT and RIGHT 120 rpm,*
 - e. Select BOTH: *check engine 4000 rpm.*
8. Flaps: *set T/O*
9. Pitch trim: *check neutral*
10. Flight controls: *check free*
11. Seat belts: *checked fastened*
12. Doors: *check closed and locked*

3.6. TAKE-OFF AND CLIMB



WARNING

On uncontrolled fields, before line up, check runway wind direction and speed and check for traffic on final

1. Parking brake: *OFF*
2. Throttle lever: *Full Forward*
3. Engine parameters: *check*
4. Rotation at V_R :

	MTOW 472.5 kg	MTOW 600 kg*
Rotation Speed (V_R)	77 km/h / 41 kts IAS	83 km/h / 45 kts IAS

*) applicable for aircraft authorized according to DM503 10/12/2021

At safe altitude:

5. Flaps: retract

	MTOW 472.5 kg	MTOW 600 kg*
Best Rate-of-Climb Speed (V_Y)	120 km/h / 65 kts IAS	120 km/h / 65 kts IAS

*) applicable for aircraft authorized according to DM503 10/12/2021

6. Electric fuel pump: *OFF*
7. Fuel pressure: *check green arc*
8. Propeller speed: *reduce at or below 5500 rpm*

Take-off into crosswind is performed with the flaps normally set at 15° (T/O).

With the ailerons deflected into the wind, accelerate the airplane to a speed slightly higher than normal while decreasing the aileron deflection as speed increases then - with authority - rotate to prevent possible settling back to the runway while drifting. When clear of the ground, make a coordinated turn into the wind to correct for drift.

NOTE

3.7. CRUISE

1. Set power at or below maximum continuous: 5500 rpm
2. Check engine parameters within limits

3.8. BEFORE LANDING

1. Electric fuel pump: *ON*
2. Fuel valve: select the fullest tank
3. Landing Light (*if applicable*): *ON*
4. On downwind, leg abeam touch down point:

Flaps: set T/O

5. On final leg:

Flaps: set Land

	MTOW 472.5 kg	MTOW 600 kg*
Final Approach Speed (V_{REF})	85 km/h / 46 kts IAS	93 km/h / 50 kts IAS

6. Optimal touchdown speed 75 km/h / 40 kts IAS (MTOW 472.5 kg);
80 km/h / 43 kts IAS (MTOW 600 kg)*

*) applicable for aircraft authorized according to DM503 10/12/2021

Normal crosswind landings are made with full flaps. Avoid prolonged slips. Increase airspeed depending on wind intensity and direction as required above normal approach and landing speeds to accommodate increased stall speed when side slip is added.

NOTE

After touchdown, hold a straight course with rudder and brakes as required.

The maximum allowable crosswind velocity is dependent upon pilot capability as well as aircraft limitations(refer to Sec 2).

3.9. BALKED LANDING

1. Throttle lever: Full Forward
2. Attitude: attain climb speed
3. Flaps position: retract to *TO* as practical
4. Electric fuel pump: *ON*

3.10. AFTER LANDING

1. Flaps: *UP*
2. Electric Fuel Pump: *OFF*
3. Landing light (*if installed*): *OFF*

3.11. ENGINE SHUT DOWN

1. Parking brake: *engage*
2. Keep engine running at about 2900 rpm for about one minute in order to reduce latent heat.
3. Avionic equipment: *OFF*
4. Magnetos: *OFF, keys extracted*
5. Strobe light (*if installed*): *OFF*
6. Master & Generator switches: *OFF*
7. Fuel selector valve: *OFF*

3.12. POSTFLIGHT CHECK

1. Flight controls/surfaces: *lock by means of gust lock (if available)*
2. Wheel chocks and wing mooring lines: *Set (if available)*
3. Parking brake: *release*
4. Doors: *Close and lock*
5. Protection covers: *install*

INTENTIONALLY LEFT BLANK

Section 5 - PERFORMANCES

INDEX

INDEX	1
1. Introduction	2
2. Use of performances charts	3
3. Airspeed indicator system calibration	4
4. ICAO Standard Atmosphere	5
5. Stall speed	6
6. Crosswind	7
7. Take-off performance	8
8. Rate of Climb	9
9. Cruise performance	11
10. Landing performance	12

1. INTRODUCTION

This section provides all necessary data for an accurate and comprehensive planning of flight activity from take-off to landing.

Data reported in graphs and/or in tables were determined using:

- ✓ aircraft and engine in good condition
- ✓ average piloting techniques

Each graph or table was determined according to ICAO Standard Atmosphere (ISA - s.l.); evaluations of the impact on performances were carried out by theoretical means for:

- ✓ Airspeed
- ✓ External temperature
- ✓ Altitude
- ✓ Weight
- ✓ Runway type and condition

2. USE OF PERFORMANCES CHARTS

Performances data are presented in tabular or graphical form to illustrate the effect of different variables such as altitude, temperature and weight. Given information is sufficient to plan the mission with required precision and safety.

Additional information is provided for each table or graph.

3. AIRSPEED INDICATOR SYSTEM CALIBRATION

The difference between indicated airspeed and calibrated airspeed is within of $\pm 5\%$ or 8 km/h, whichever is greater, for all speeds above 1.3 Vs.

4. ICAO STANDARD ATMOSPHERE

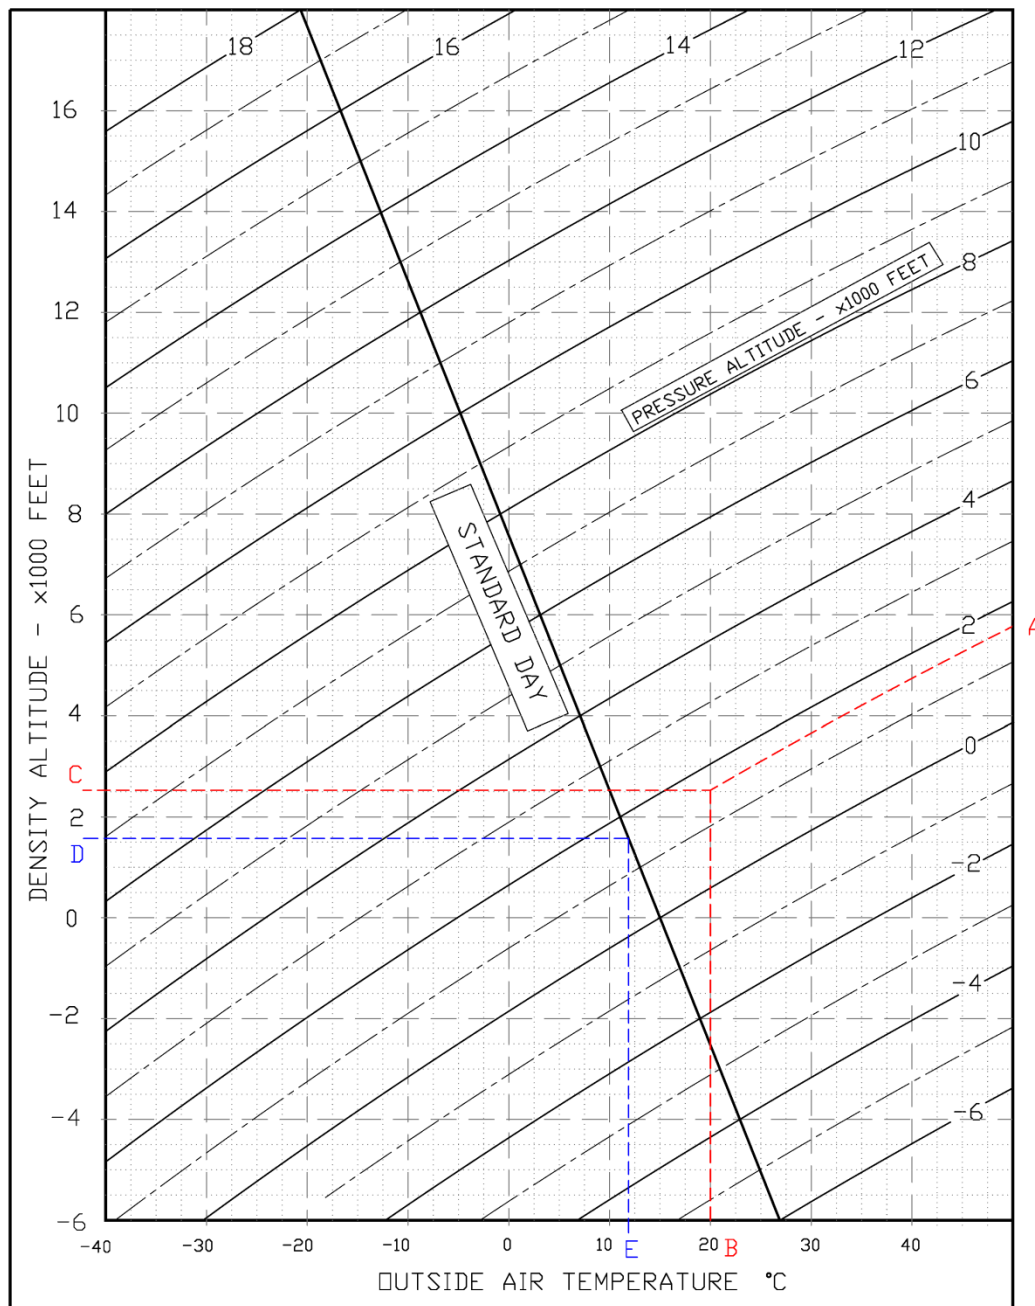


FIG. 5-2. ICAO CHART

Examples:

<u>Scope</u>	<u>Given</u>	<u>Find</u>
<u>Density Altitude:</u>	A: Pressure altitude = 1600ft B: Temperature = 20°C	→ C: Density Altitude = 2550ft
<u>ISA Temperature:</u>	D: Pressure altitude = 1600ft	→ E: ISA Air Temperature = 12°C

5. STALL SPEED

CONDITIONS:

- engine idle
- no ground effect

MTOW 450 kg

FLAPS	LATERAL BANKING							
	0°		30°		45°		60°	
	IAS Km/h	IAS kts	IAS Km/h	IAS kts	IAS Km/h	IAS kts	IAS Km/h	IAS kts
0°	74	40	78	42	84	45	101	54
15°	69	37	76	41	79	43	97	52
35°	65	35	69	37	78	42	91	49

MTOW 600 kg*

FLAPS	LATERAL BANKING							
	0°		30°		45°		60°	
	IAS Km/h	IAS kts	IAS Km/h	IAS kts	IAS Km/h	IAS kts	IAS Km/h	IAS kts
0°	80	43	87	47	96	52	117	63
15°	74	40	80	43	91	49	111	60
35°	69	37	74	40	83	45	100	54

*) applicable for aircraft authorized according to DM503 12/10/2021

NOTE

Altitude loss during conventional stall recovery, as demonstrated during flight tests is approximately 200 ft with banking below 20°. For Stall Recovery procedure, see Section 3.

6. CROSSWIND

Maximum demonstrated crosswind is 15 Kts

⇒ Example:

Given

Wind direction (with respect to aircraft longitudinal axis) = 30°

Wind speed = 20 Kts

Find

Headwind = 17.5 Kts

Crosswind = 10 Kts

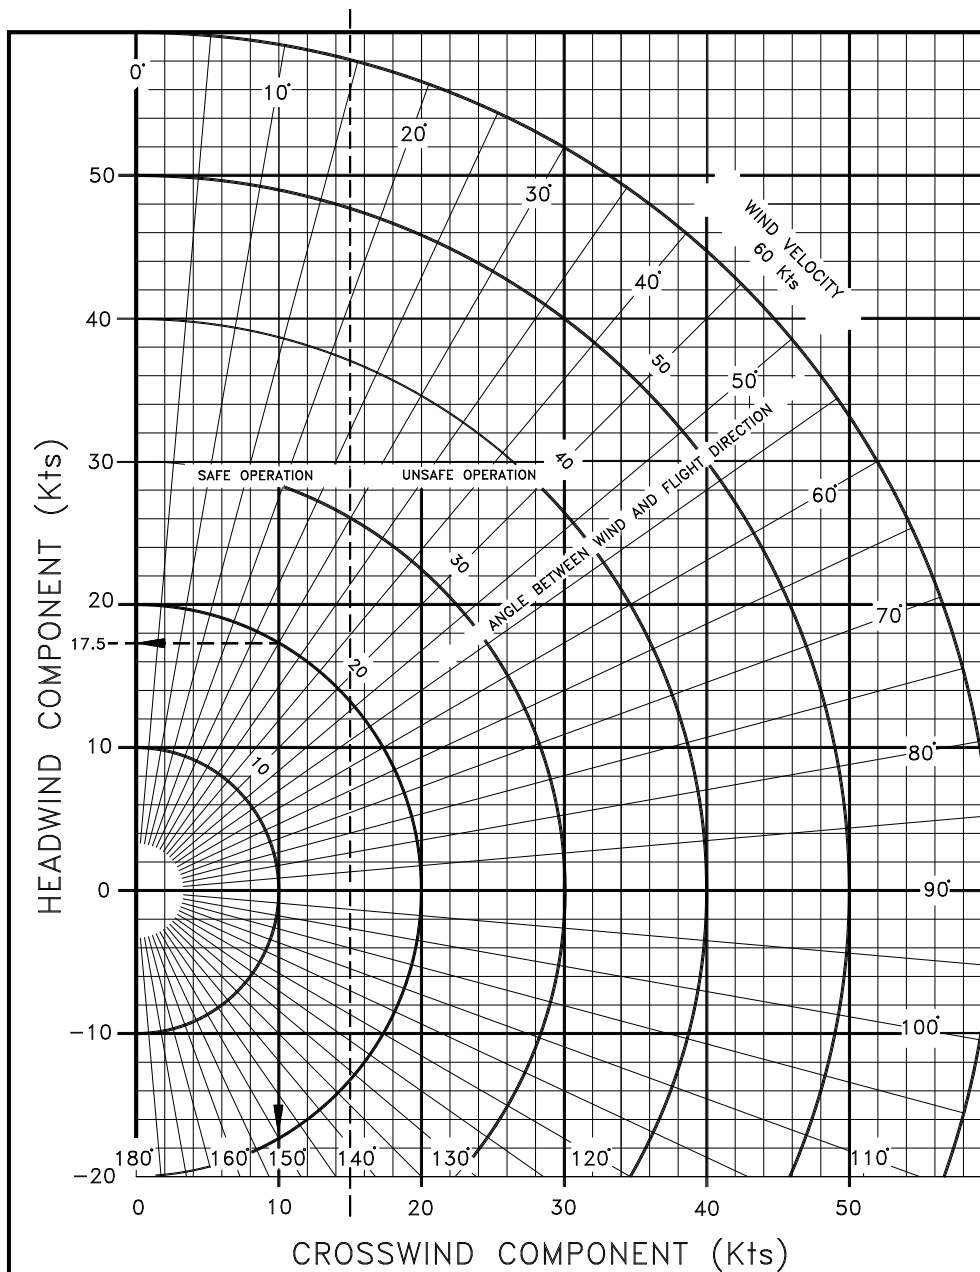


FIG. 5-3. CROSSWIND CHART

7. TAKE-OFF PERFORMANCE

Weight = 600 kg*						
		Corrections				
Flaps: T/O		Headwind: - 2.5m for each kt (8 ft/kt)				
Speed at Lift-Off = 45 KIAS		Tailwind: + 10m for each kt (33ft/kt)				
Throttle Lever: Full Forward		Paved Runway: - 6% to Ground Roll				
Runway: Grass		Runway slope: + 5% to Ground Roll for each +1%				
Pressure Altitude		Distance [m]				
		Temperature [°C]				ISA
[ft]		-25	0	25	50	
S.L.	Ground Roll	150	188	232	282	214
	At 50 ft AGL	261	326	399	481	369
1000	Ground Roll	163	205	253	307	230
	At 50 ft AGL	284	355	434	523	395
2000	Ground Roll	178	224	277	337	247
	At 50 ft AGL	309	386	473	573	423
3000	Ground Roll	194	245	302	377	265
	At 50 ft AGL	336	420	515	639	453
4000	Ground Roll	213	268	331	422	285
	At 50 ft AGL	367	458	561	712	486
5000	Ground Roll	232	293	370	472	306
	At 50 ft AGL	400	499	627	794	521
6000	Ground Roll	254	320	415	528	329
	At 50 ft AGL	436	545	700	885	559
7000	Ground Roll	279	357	465	590	361
	At 50 ft AGL	476	605	782	987	612
8000	Ground Roll	305	400	521	661	397
	At 50 ft AGL	520	677	874	1101	671
9000	Ground Roll	336	449	583	739	436
	At 50 ft AGL	571	757	976	1229	735
10000	Ground Roll	378	505	654	828	478
	At 50 ft AGL	640	847	1090	1371	805

*) applicable for aircraft authorized according to DM503 12/10/21

Weight = 450 kg

Flaps: *T/O*

Speed at Lift-Off = 41 KIAS

Throttle Lever: *Full Forward*

Runway: *Grass*

Corrections

Headwind: - 2.5m for each kt (8 ft/kt)

Tailwind: + 10m for each kt (33ft/kt)

Paved Runway: - 6% to Ground Roll

Runway slope: + 5% to Ground Roll for each +1%

Pressure Altitude		Distance [m]				
		Temperature [°C]				ISA
[ft]		-25	0	25	50	
S.L.	Ground Roll	68	93	123	155	108
	At 50 ft AGL	141	179	221	262	200
1000	Ground Roll	70	98	127	159	118
	At 50 ft AGL	185	201	243	289	219
2000	Ground Roll	83	110	141	175	129
	At 50 ft AGL	181	220	261	301	240
3000	Ground Roll	91	122	154	184	138
	At 50 ft AGL	187	233	281	332	258
4000	Ground Roll	105	133	171	199	150
	At 50 ft AGL	205	254	301	351	279
5000	Ground Roll	117	148	181	209	164
	At 50 ft AGL	210	275	327	376	301
6000	Ground Roll	131	159	189	219	178
	At 50 ft AGL	264	312	362	413	337
7000	Ground Roll	149	182	209	241	198
	At 50 ft AGL	302	351	400	453	377
8000	Ground Roll	172	201	231	263	219
	At 50 ft AGL	346	390	442	495	416
9000	Ground Roll	190	221	254	280	237
	At 50 ft AGL	382	431	479	531	458
10000	Ground Roll	208	240	270	299	259
	At 50 ft AGL	424	473	524	573	498

8. RATE OF CLIMB

Throttle lever: Full forward Flaps: Up $V_Y = 65$ KIAS $V_X = 62$ KIAS						
Weight [kg]	Pressure Altitude [ft]	Rate of Climb [ft/min] at V_Y				
		Temperature [°C]				ISA
		-25	0	25	50	
600*	S.L.	1322	1083	871	693	957
	2000	1145	911	708	519	817
	4000	961	740	536	352	675
	6000	881	648	430	247	537
	8000	736	507	300	25	404
	10000	585	355	150	-25	259
450	S.L.	1557	1324	1116	929	1220
	2000	1416	1183	972	785	1080
	4000	1275	1042	836	647	942
	6000	1141	901	690	500	799
	8000	1005	769	553	372	661
	10000	866	625	407	216	516

*) applicable for aircraft authorized according to DM503 12/10/21

9. CRUISE PERFORMANCE

Pressure altitude H_P :

0 ft OAT: +15°C

Engine RPM	Speed TAS [km/h]	Speed TAS [kts]	Consumption (lt/h)
4300	189	102	14
4800	198	107	18
5200	204	110	21

10. LANDING PERFORMANCE

Weight = 600 kg* Flaps: LAND Final Approach Speed = 50 KIAS Throttle Levers: Idle Runway: Grass						
Corrections Headwind: - 5m for each kt (16 ft/kt) Tailwind: + 11m for each kt (36ft/kt) Paved Runway: - 2% to Ground Roll Runway slope: - 2.5% to Ground Roll for each +1%						
Pressure Altitude [ft]		Distance [m]				
		Temperature [°C]				ISA
		-25	0	25	50	
S.L.	Ground Roll	132	146	159	172	154
	At 50 ft AGL	260	286	312	338	302
1000	Ground Roll	137	151	165	179	158
	At 50 ft AGL	269	296	324	351	311
2000	Ground Roll	142	157	171	185	163
	At 50 ft AGL	279	307	336	364	320
3000	Ground Roll	148	162	177	192	168
	At 50 ft AGL	290	319	348	377	330
4000	Ground Roll	153	169	184	199	173
	At 50 ft AGL	301	331	361	392	340
5000	Ground Roll	159	175	191	207	178
	At 50 ft AGL	312	344	375	406	350
6000	Ground Roll	165	182	198	215	184
	At 50 ft AGL	324	357	389	422	361
7000	Ground Roll	171	189	206	223	189
	At 50 ft AGL	337	370	404	438	372
8000	Ground Roll	178	196	214	232	195
	At 50 ft AGL	350	385	420	455	384
9000	Ground Roll	185	204	222	241	202
	At 50 ft AGL	363	400	437	473	396
10000	Ground Roll	192	212	231	250	208
	At 50 ft AGL	378	416	454	492	408

*) applicable for aircraft authorized according to DM503 12/10/21

Weight = 450 kg Flaps: LAND Short Final Approach Speed = 46 KIAS Throttle Levers: Idle Runway: Grass						
Corrections Headwind: - 5m for each kt (16 ft/kt) Tailwind: + 11m for each kt (36ft/kt) Paved Runway: - 2% to Ground Roll Runway slope: - 2.5% to Ground Roll for each +1%						
Pressure Altitude [ft]		Distance [m]				
		Temperature [°C]				ISA
		-25	0	25	50	
S.L.	Ground Roll	76	86	98	109	90
	At 50 ft AGL	217	238	261	283	250
1000	Ground Roll	79	88	98	107	93
	At 50 ft AGL	223	246	265	288	256
2000	Ground Roll	80	90	101	112	97
	At 50 ft AGL	233	250	271	292	261
3000	Ground Roll	84	93	108	119	101
	At 50 ft AGL	235	255	277	294	267
4000	Ground Roll	91	100	110	121	105
	At 50 ft AGL	241	262	282	305	273
5000	Ground Roll	93	104	113	125	109
	At 50 ft AGL	250	269	289	314	280
6000	Ground Roll	98	107	119	131	112
	At 50 ft AGL	253	277	295	320	289
7000	Ground Roll	101	109	120	133	115
	At 50 ft AGL	269	287	304	326	296
8000	Ground Roll	104	112	125	139	119
	At 50 ft AGL	272	291	316	338	303
9000	Ground Roll	106	117	129	140	123
	At 50 ft AGL	288	300	321	342	310
10000	Ground Roll	111	122	135	148	127
	At 50 ft AGL	286	308	328	351	318

INTENTIONALLY LEFT BLANK

SECTION 6 – WEIGHT and BALANCE

INDEX

1	Introduction	2
2	Weighing Procedure.....	3
2.1	Preparation	3
2.2	Levelling.....	3
2.3	Weighing.....	3
2.4	Determination of C.G. Location.....	3
3	Weighing Report (I)	5
4	Weighing Report (II).....	6
5	Weight and Balance Determination for Flight	7
5.1	USE OF “WEIGHT & BALANCE” CHART	7

1 INTRODUCTION

This section describes the procedure for establishing the basic empty weight and the moment of the aircraft. Loading procedure information is also provided.

NOTE

Aircraft must be operated in accordance with the limits concerning the maximum take-off weight and CG excursion as reported in Flight Manual Section 2.

Pilot is responsible for checking the weight and CG excursion are compliant with the related limits. CG excursion and weight limits are reported in Section 2 – Limitations.

2 WEIGHING PROCEDURE

2.1 PREPARATION

- Carry out weighing procedure inside closed hangar
- Remove from cabin any objects left unintentionally
- Insure on board presence of the Flight Manual
- Align nose wheel
- Drain fuel via the specific drain valve.
- The unusable fuel for each tank must be considered (1.55 liter)
- Oil, hydraulic fluid and coolant to operating levels
- Raise flaps to fully retracted position (0°)
- Place control surfaces in neutral position
- Place scales (min. capacity 200 kg) under each wheel

2.2 LEVELLING

- Level the aircraft.
Reference for levelling: remove a seat and then place a level between the two seat's fwd and aft supporting trusses.
- Center bubble on level by deflating nose tire

2.3 WEIGHING

- Record weight shown on each scale
- Repeat weighing procedure three times
- Calculate empty weight

2.4 DETERMINATION OF C.G. LOCATION

- Drop a plumb bob tangent to the leading edge (at 15mm inboard respect the rib#7 riveting line) and trace reference mark on the floor.
- Repeat operation for other wing.
- Stretch a taught line between the two marks
- Measure the distance between the reference line and main wheel axis
- Using recorded data it is possible to determine the aircraft's C.G. location and moment (see following table)


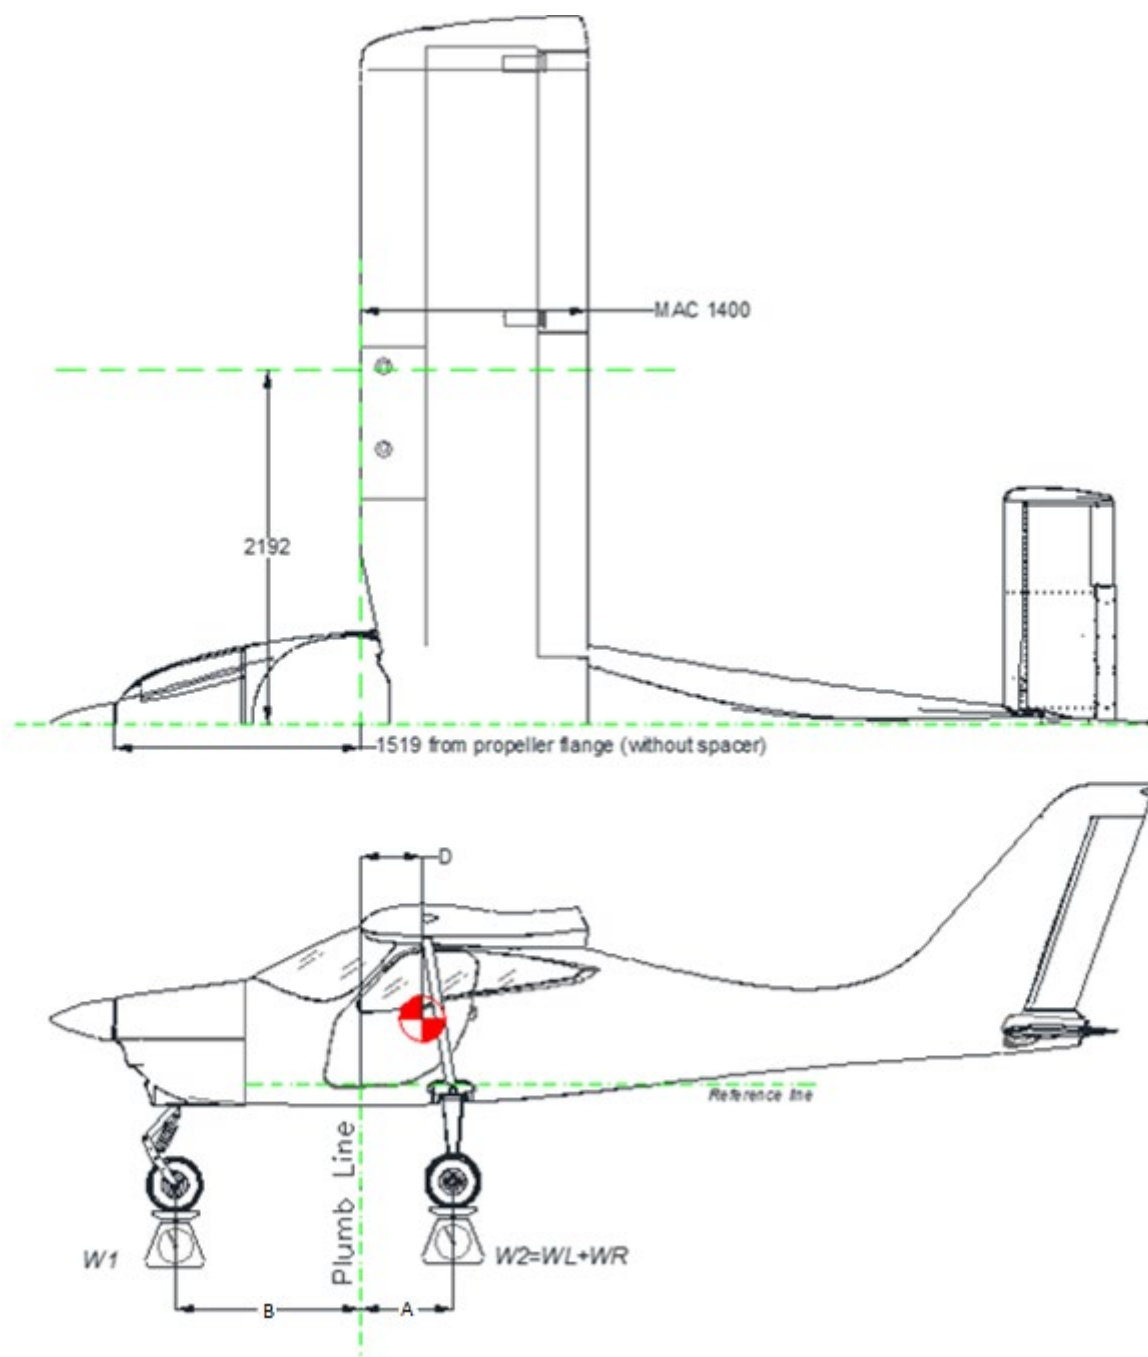


Fig.6-1-P92 Echo MkII

3 WEIGHING REPORT (I)

Model **P92Echo MKII** S/N: _____ Weighing no. _____ Date: _____

Datum: Propeller support flange without spacer.

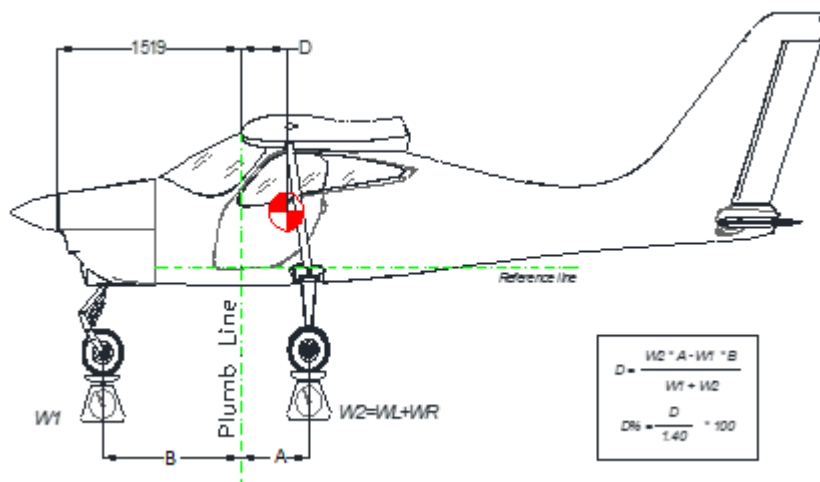

	Kg		meters
Nose wheel weight	$W_1 =$	Plumb bob distance ⁽¹⁾ LH wheel	$A_L =$
LH wheel weight	$W_L =$	Plumb bob distance ⁽¹⁾ RH wheel	$A_R =$
RH wheel weight	$W_R =$	Average distance $(A_L + A_R)/2$	$A =$
$W_2 = W_L + W_R =$		Bob distance from nose wheel ⁽¹⁾	$B =$

Empty weight $W_e = W_1 + W_2 =$

$D = \frac{W_2 \cdot A - W_1 \cdot B}{W_e} = m$	$D\% = \frac{D}{1.400} \cdot 100 =$
---	-------------------------------------

Empty weight moment: $M = [(D + 1.519) \cdot W_e] = Kg \cdot m$


Maximum takeoff weight	$W_T =$	Kg
Empty weight	$W_e =$	Kg
Maximum payload $W_T - W_e$	$W_u =$	Kg

(1) To determine the Mean Aerodynamic Chord (MAC) and the plumb line see FIG.6-1.

4 WEIGHING REPORT (II)

Model **P92Echo MKII** S/N: _____ Weighing no. _____ Date: _____

Datum: Propeller support flange without spacer.

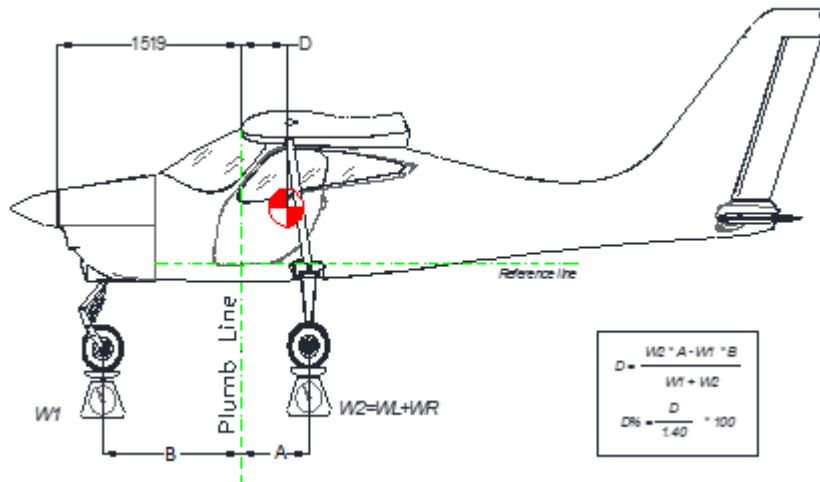

	Kg		meters
Nose wheel weight	$W_1 =$	Plumb bob distance ⁽¹⁾ LH wheel	$A_L =$
LH wheel weight	$W_L =$	Plumb bob distance ⁽¹⁾ RH wheel	$A_R =$
RH wheel weight	$W_R =$	Average distance $(A_L + A_R)/2$	$A =$
$W_2 = W_L + W_R =$		Bob distance from nose wheel ⁽¹⁾	$B =$

Empty weight $W_e = W_1 + W_2 =$

$D = \frac{W_2 \cdot A - W_1 \cdot B}{W_e} = m$	$D\% = \frac{D}{1.400} \cdot 100 =$
---	-------------------------------------

Empty weight moment: $M = [(D + 1.519) \cdot W_e] = Kg \cdot m$

Maximum takeoff weight	$W_T =$	Kg
Empty weight	$W_e =$	Kg
Maximum payload $W_T - W_e$	$W_u =$	Kg

(1) To determine the Mean Aerodynamic Chord (MAC) and the plumb line see FIG.6-1.

5 WEIGHT AND BALANCE DETERMINATION FOR FLIGHT

In this subsection, the procedure to be used for the determination of aircraft weight and balance in flight is described. The weight and moment obtained must fall within the approved Weight-Moment Envelope (Figure 6-3). The procedure explained requires the use of:

- Aircraft Weighing Report (I/II)
- Weight and C.G. - Form (Table 6-1)
- Loading Diagram (Figure 6-2)
- Weight-Moment Envelope (Figure 6-3)

An example calculation is provided to help understand the method.

5.1 USE OF “WEIGHT & BALANCE” CHART

To determine weight and balance for flight, proceed as follows:

1. Read the most recent values of the Empty A/C weight and corresponding moment from the Aircraft Weighing Report and write them in the Weight and C.G.- Form (Table 6-1).
2. Write the weight and moment of the pilot/co-pilot in the Weight and C.G. - Form (Table 6-1). Calculate the moment as:

Moment = weight X arm where the arm is read in Table 6-1.

NOTE

It is strongly recommended to perform a cross-check with Loading Tables (Table 6-3) to assure an accurate loading value.

3. Repeat the procedure described in 2 for the fuel and baggage loads.
4. The total weight/moment is obtained summing all weights/moments; report take-off condition (weight and CG) in the Weight and Balance C.G. - Form (Table 6-1).
5. If the point falls within the envelope, the loading condition meets the weight and balance requirements

Table 6-1 -Weight and C.G.- Form

	W [kg]	Arm [m]	Moment (M) = W * Arm [kg*m]
Empty weight	340	0.309	621.52
LOADING			
Pilot	60	1.948	155.84
Co-pilot		1.948	
Baggage		2.320	
Usable fuel Fuel (liters)* ρ_{fuel} (0.72) [kg]	(40 litres) 28.8	1.774	51.09
TAKE-OFF CONDITION			
Take-off condition $W_{TO} = \sum W$	428.8	$M_{TO} = \sum M$	828.45
	CG[%cma]= [$((M/W_{TO}) - 1.519)/1.4$]*100	29.5%	

Table 6-2 -Weight and C.G.- Example

	W [kg]	Arm [m]	Moment (M) = W * Arm [kg*m]
Empty weight			
LOADING			
Pilot		1.948	
Co-pilot		1.948	
Baggage		2.320	
Usable fuel Fuel (liters)* ρ_{fuel} (0.72) [kg]		1.774	
TAKE-OFF CONDITION			
Take-off condition $W_{TO} = \sum W$		$M_{TO} = \sum M$	
	CG[%cma]= [$((M/W_{TO}) - 1.519)/1.4$]*100		

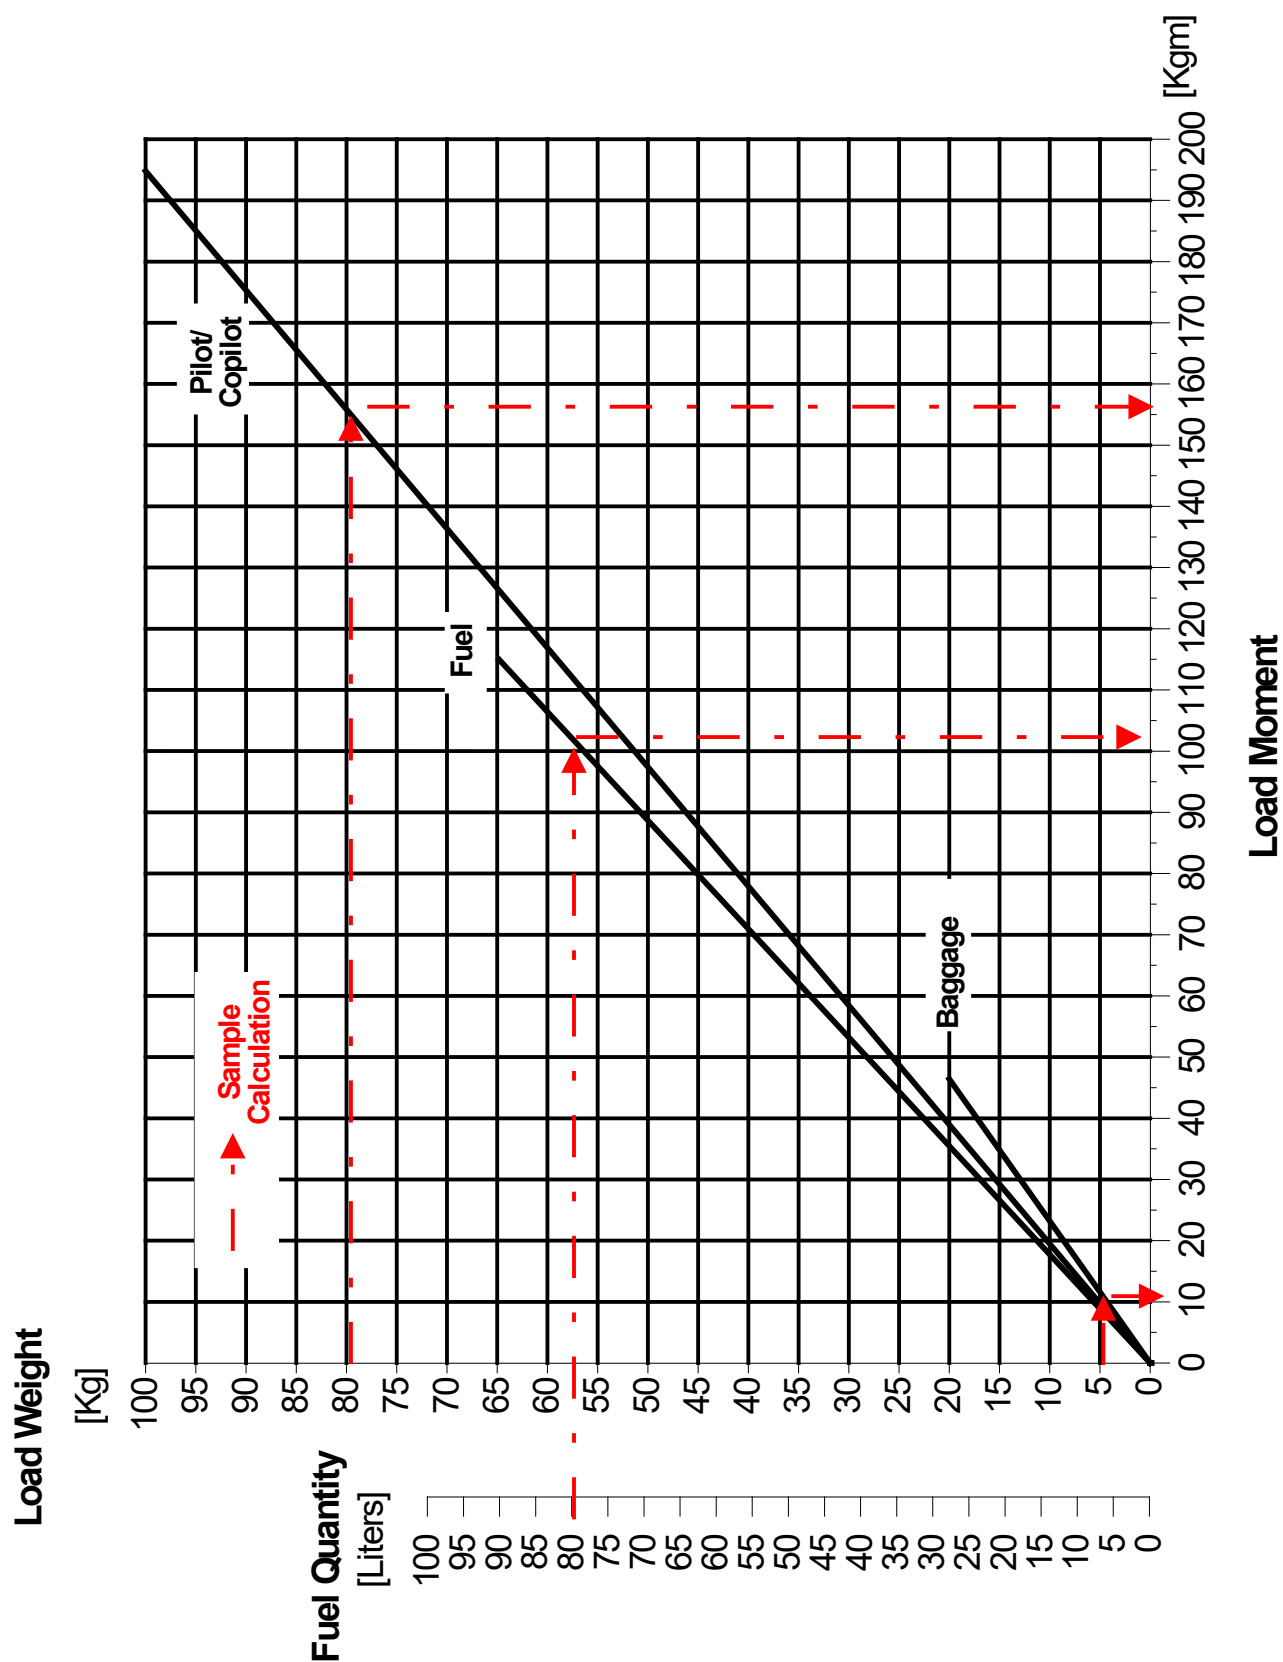


Fig.6.2 LOADING DIAGRAM

Table 6-3 –Loading tables

Pilot/Co-pilot loading		Baggage loading	
W [kg]	M [kg*m]	W [kg]	M [kg*m]
5	9.7	2	4.6
10	19.5	4	9.3
15	29.2	6	13.9
20	39.0	8	18.6
30	58.4	10	23.2
40	77.9	12	27.8
50	97.4	14	32.5
60	116.9	16	37.1
65	126.6	18	41.8
70	136.4	20	46.4
75	146.1		
80	155.8		
85	165.6		
90	175.3		
95	185.1		
100	194.8		

Fuel loading		
W [litres]	W [kg]	M [kg*m]
10	7.2	12.8
20	14.4	25.5
30	21.6	38.3
40	28.8	51.1
50	36.0	63.9
60	43.2	76.6
65	46.8	83.0
70	50.4	89.4
75	54.0	95.8
80	57.6	102.2
85	61.2	108.6
90	64.8	115.0
95	68.4	12.8
100	72.0	25.5

SEZIONE 7 – AIRFRAME AND SYSTEMS DESCRIPTION

INDEX

1. Introduction	2
2. Airframe	2
2.1. Wing	2
2.2. Fuselage	2
2.3. Empennages	3
3. FLIGHT CONTROLS	4
4. LANDING GEAR	8
5. WHEEL AND BREAKES	9
6. AVIONIC SYSTEM	10
7. POWERPLANT	12
7.1. Engine	12
7.2 Propeller.....	12
7.3 Fuel System	13
8 LUGGAGE COMPARTMENT.....	14
9 DOORS.....	15
10 SEATS	16
11 RESCUE SYSTEM.....	17

1. Introduction

This section provides description and operation of the aircraft and its systems.

2. Airframe

2.1. WING

The wing is of a rectangular planform, with a small tapering of the leading edge near the cabin, allowing an improved visibility, also in steep turn. Its structure consists of a single spar metal torsion box. The aircraft is equipped with half-span slot flaps, with the flap hinge positioned on the lower part of the wing. All structural parts are made of aluminum light alloy (2024-T3 and 6061-T6), except for tips and fairings which are in fiberglass.

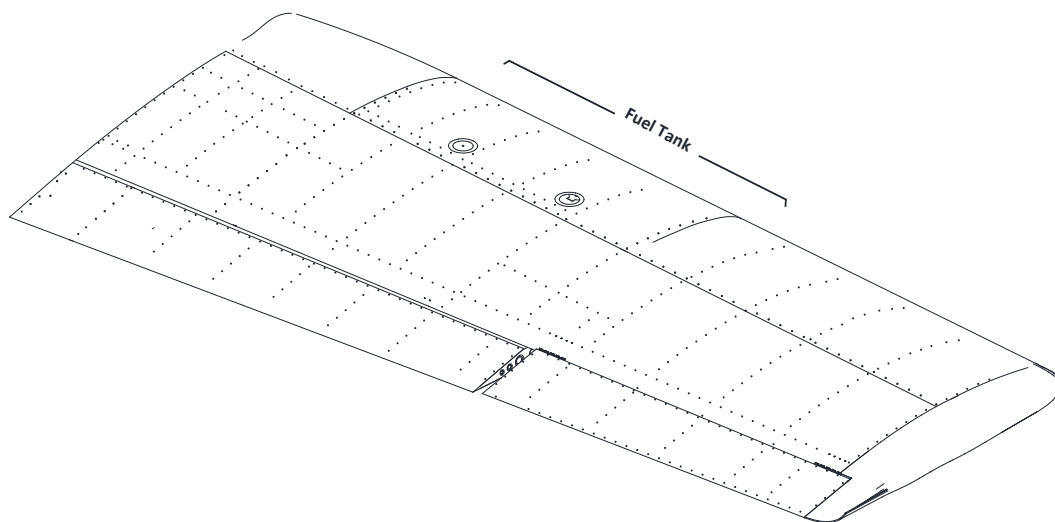


Fig. 7-1. RIGHT WING EXPLODED VIEW

2.2. FUSELAGE

The P92 Echo MkII fuselage is mainly made by carbon fibers composite materials. The fuselage is made by two main shells that are later assembled bonding the two main bodies and the floor (in composite material too) and adding aluminum stiffeners that allow the connection of the main landing gear, seats, wing and instrument panel. In this context the fuselage and vertical fin are a unique body. The following picture shows the main components of the fuselage section.

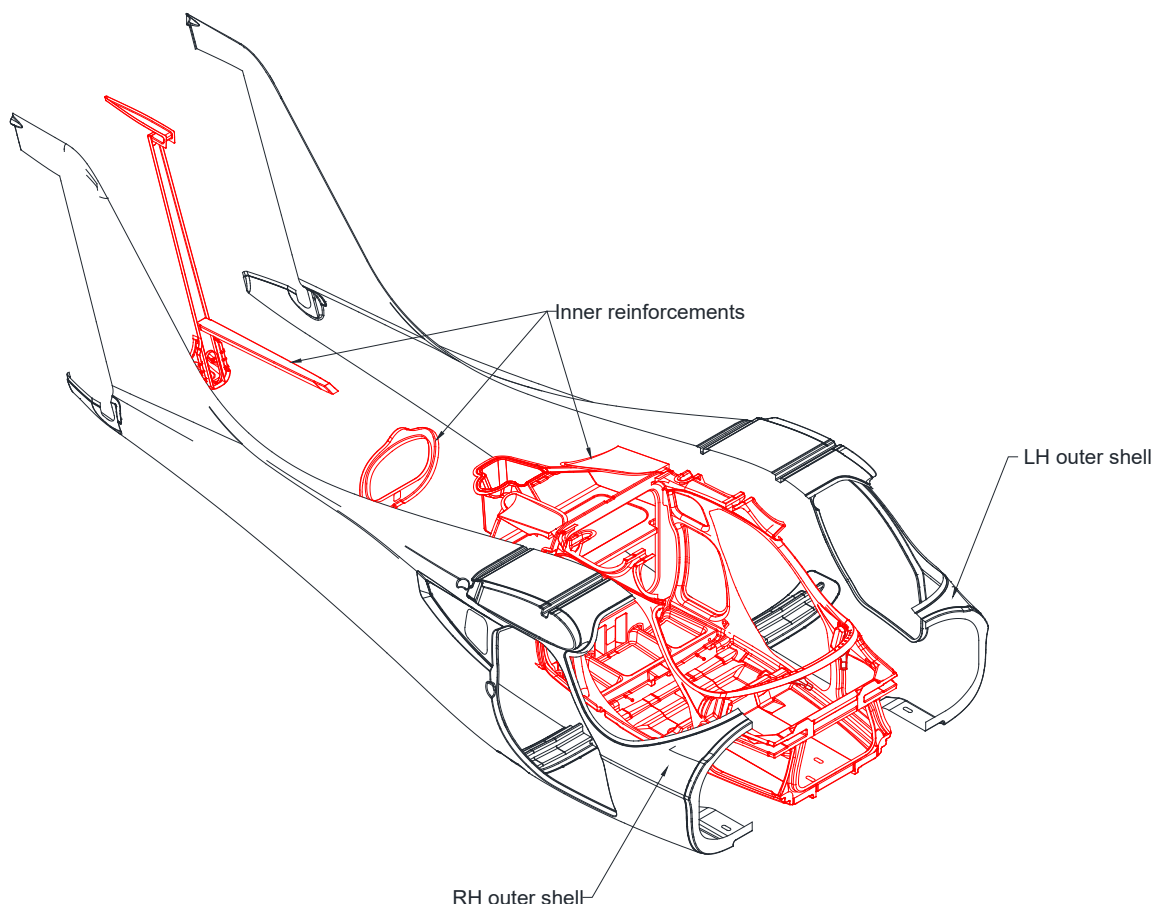


Fig. 7-2.P92 Echo MkII fuselage

2.3. EMPENNAGES

The horizontal trimmable tail plane is all-moving type, which allows a high control authority and a better stick free stability. The vertical tail is conventional fin and rudder type. Both horizontal and rudder structures are aluminum light alloy (2024-T3 and 6061-T6), except fin, which is a carbon fiber unique body with the fuselage, and tips, which are in fiberglass.

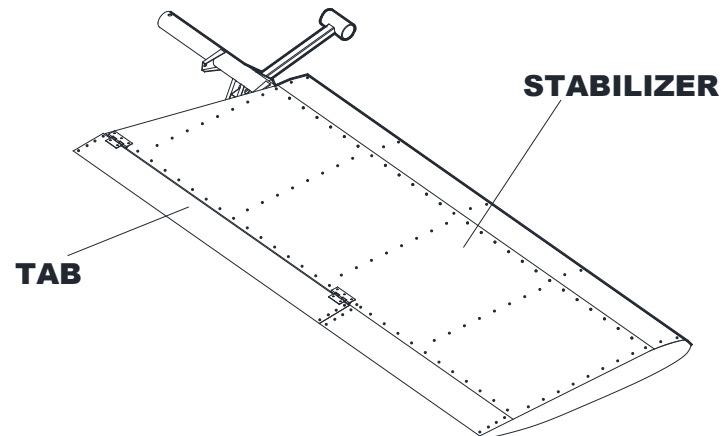


Fig. 7-3. P92 Echo MkII stabilator and tab

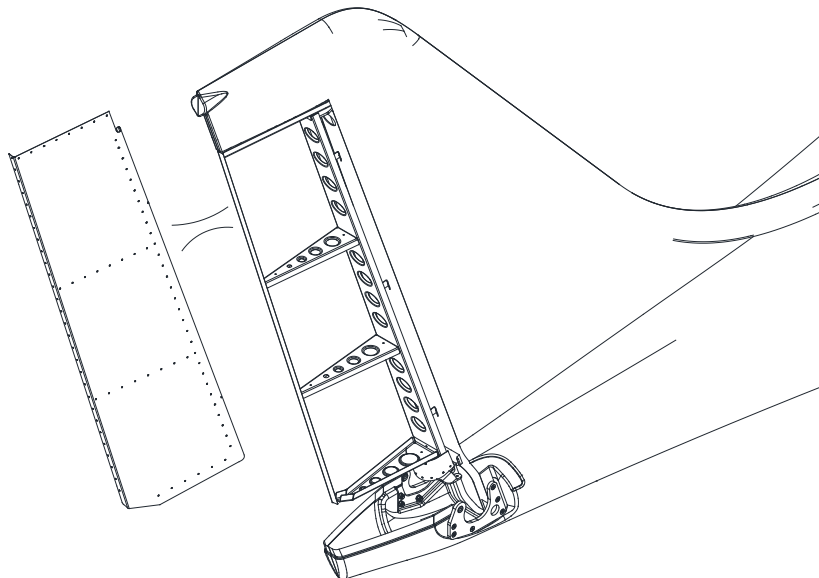


Fig. 7-4. P92 Echo MkII vertical tail and fin

3. FLIGHT CONTROLS

The primary flight controls are of conventional type, operated by control stick and rudder pedals. Stabilator, as per Figure 7-4, is actuated by push-pull rods and cables.

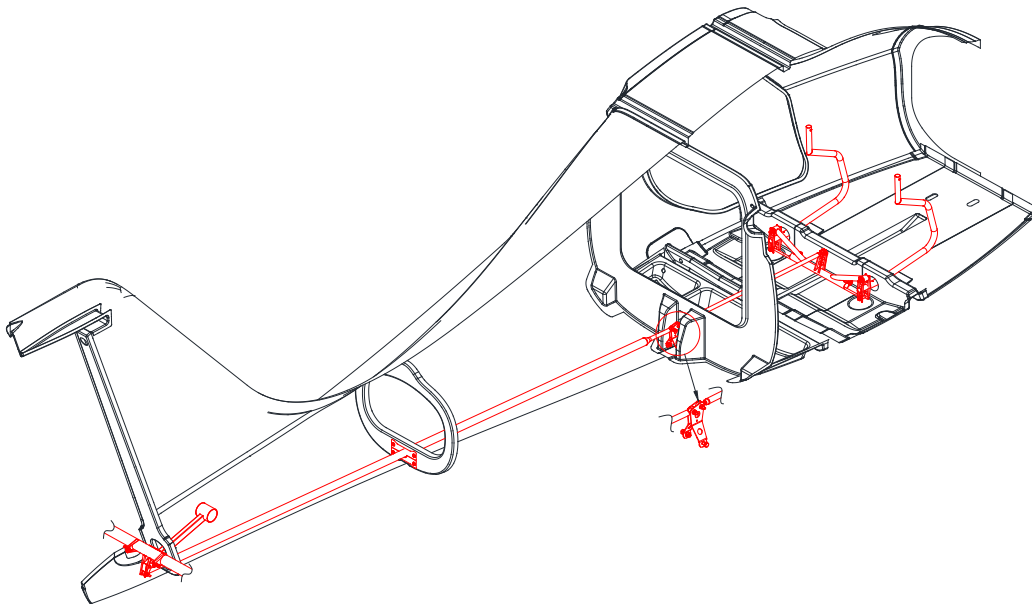


Fig. 7-4. P92 Echo MkII stabilator control line system

Ailerons, as per Figure 7-5, are actuated by push-pull rods on wing and cable in fuselage.

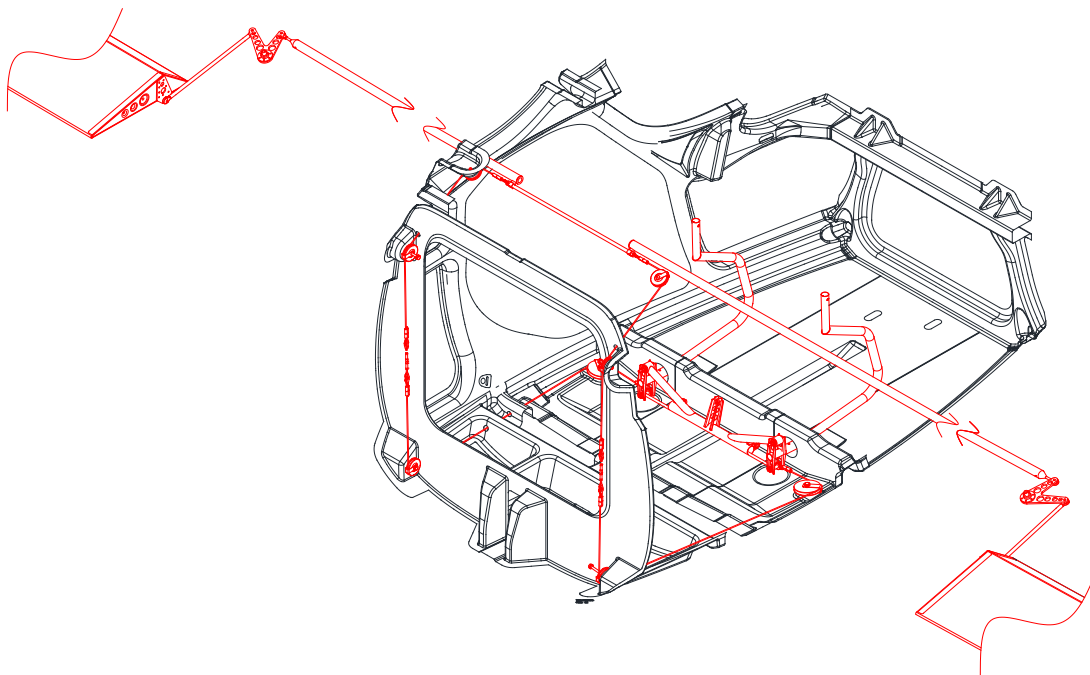


Fig. 7-5. P92 Echo MkII aileron control line

In accordance with Figure 7-6, the rudder is operated by a cable line.

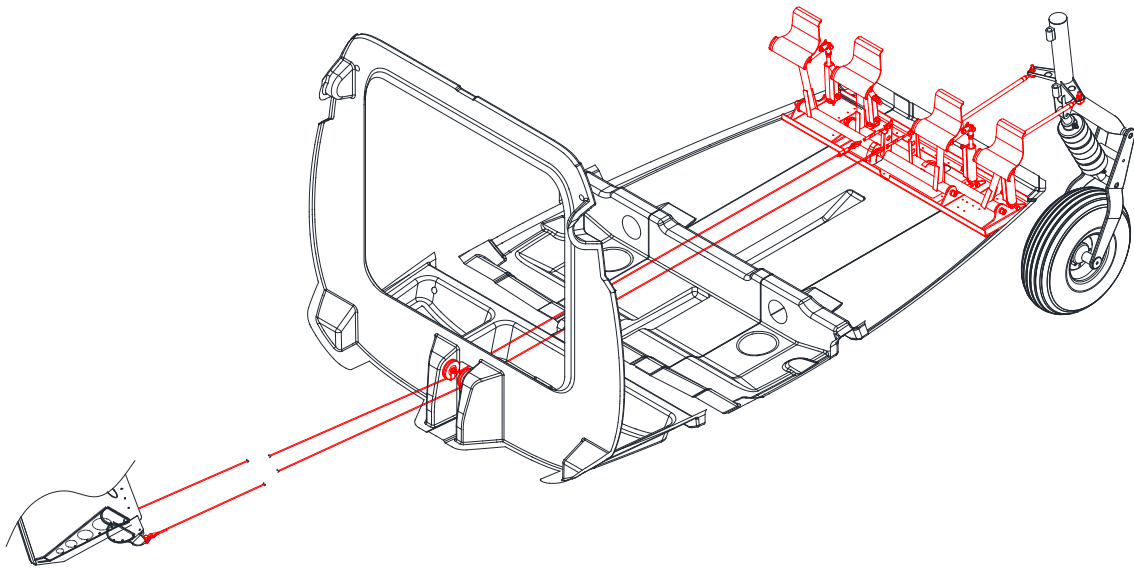


Fig. 7-6. P92 Echo MkII rudder control line

Trimming device for longitudinal is provided by push/pull rod-type system controlled by an electrical actuator. Trim position indicator is installed on A/C cockpit. In the following figure, the pitch trim tab actuation is shown.

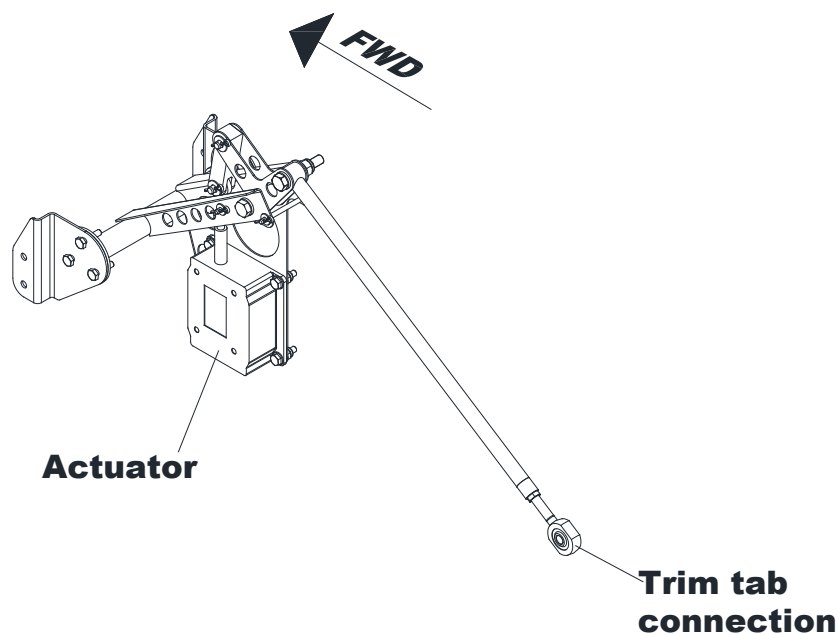


Fig. 7-7. P92 Echo MkII trim tab control line

The flap control system is reported in Figure 7-8. The system is actuated by means of a linear electrical actuator connected to rods transmitting the movement to the flap surfaces.

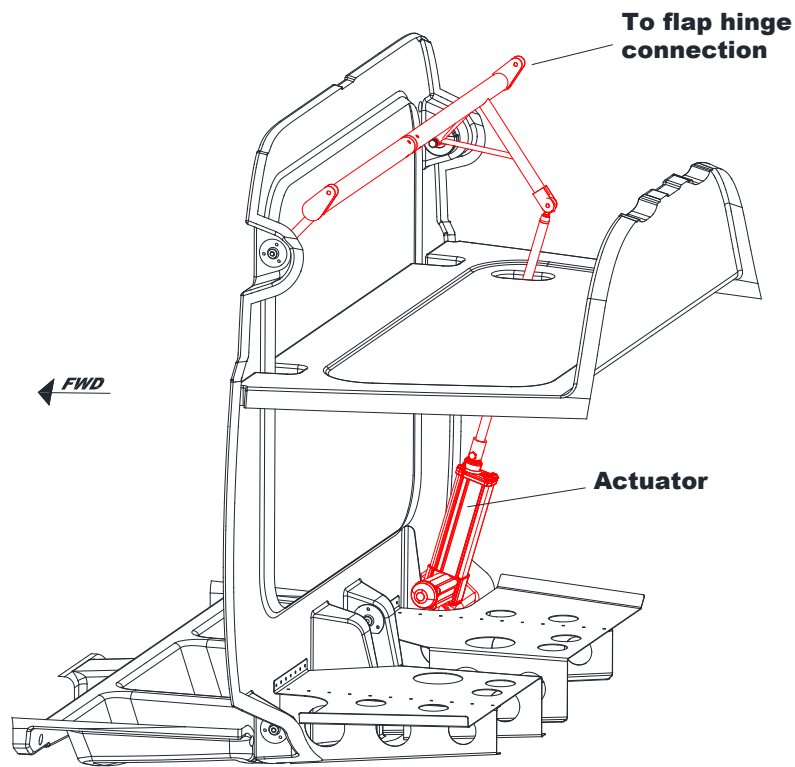


Fig. 7-8. P92 Echo MkII flap control system

4. LANDING GEAR

The main landing gear is realized with simple steel spring-leaves, 5.00x5 wheel and tires, disc brakes, renewed for their operational record of effectiveness and safety.

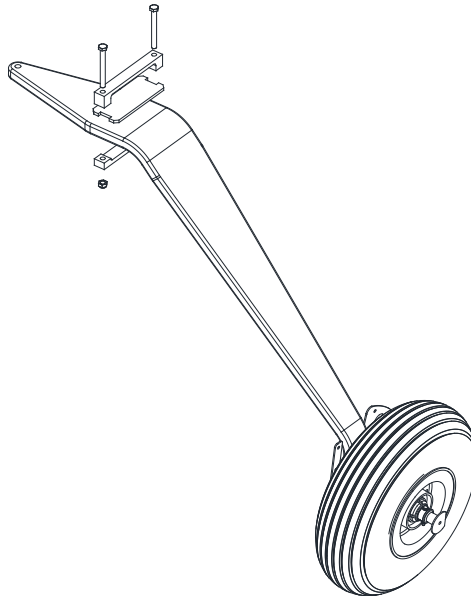


Fig. 7-9. P92 Echo MkII Main Landing Gear

The nose gear features a steerable wheel with a rubber doughnut shock absorber.

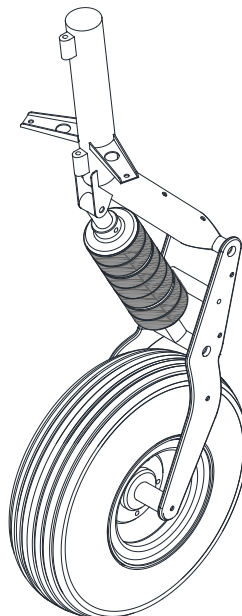


Fig. 7-10. P92 Echo MkII Nose Landing Gear

5. WHEEL AND BRAKES

The brake system installed on P92 Echo MkII consists of an independent hydraulically actuated brake system, one for each main wheel, and is composed of the following items:

- 2 brake calipers, located on the inner sides of the main wheels;
- 4 master cylinders (P/N MC-4), located on the back side of co-pilot pedals;
- 1 parking brake valve (P/N PVPVD), located downstream the master cylinders, used to trap a column of fluid between the valve itself and the brake calipers to firmly stop the wheels.
- 1 oil reservoir with P/N 03-3508-0264-3.

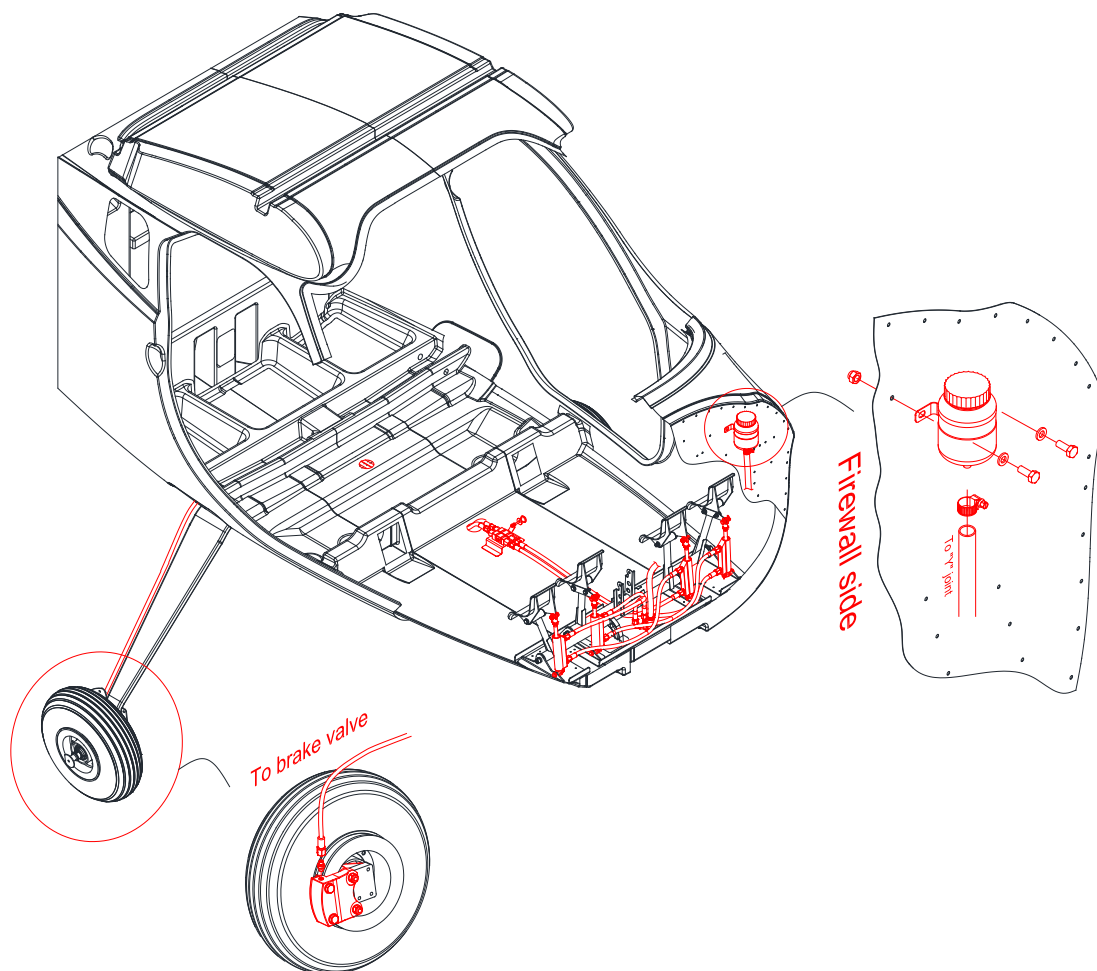


Fig. 7-11. P92 Echo MkII Brake System

NOTE

Flight without wheel fairings can be conducted without significantly affect aircraft performance and handling qualities.

6. AVIONIC SYSTEM

The electric system installed on P92 Echo MkII is characterized by a rated voltage of 13.5 V DC furnished by a generator of 250 W DC. A 12-volts battery with a capacity of 18 Amph furnishes the power needed for aircraft start up and a reserve energy in case of anomalies to the generator. The generator connected to a regulator/rectifier supplies DC power to the bus bars and to recharge the battery. A red warning light on the instrument panel will turn on indicating to the pilot that the generator is not operating. Circuit protection is through breaker located on right side of instrument panel.

The avionic system installed on P92 Echo MkII is based on Garmin G3X touch integrated avionic suite in a dual screen configuration (GDU 460). It provides flight information (through GSU 25 that records air, attitude and heading data, GMU 22 magnetometer and GTP 59 temperature probe) and primary engine information (through the engine module GSA 24).

Stand-alone external COM/NAV sources (Garmin GTR 225A) is installed. The GTX 35R remote transponder unit is installed. In figure below, the avionic schemes are presented.

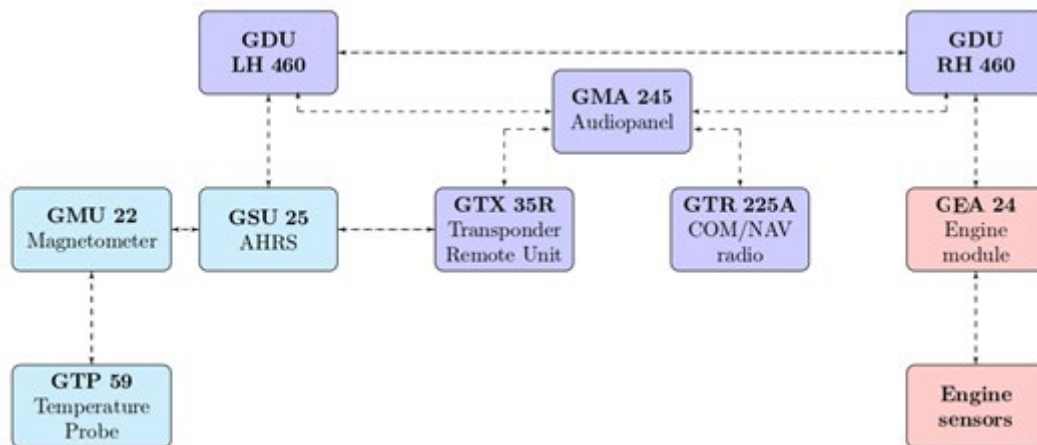


Fig. 7-12. Avionic Scheme

The generator provides DC power also to the following electrical utilities:

- 1) Fuel pump system
- 2) Flap actuator
- 3) Trim tab actuator

In the following figure a scheme of the cockpit configuration is shown.



Fig. 7-13. P92 Echo MkII instrument panel

7. POWERPLANT

7.1. ENGINE

P92 Echo MkII is equipped with a Rotax 912 ULS 2 100 horse powered engine.



Fig. 7-14. Rotax 912 ULS 2 engine

The main engine characteristics are:

- 4 stroke, 4 cylinders. horizontally opposed, spark ignition engine, single central camshaft hydraulic tappets - push rods – OHV;
- Liquid cooled cylinder heads;
- Ram air cooled cylinders;
- Dry sump forced lubrication;
- Dual ignition of breakerless, capacitor discharge design;
- 2 constant depression carburetors;
- Mechanical fuel pumps;
- Electric starter 12 V 0.9 kW;
- Integrated AC generator with external rectifier regulator;
- Propeller drive via integrated gearbox with mechanical shock absorber and overload clutch.

7.2 PROPELLER

P92 Echo MkII is equipped with a Sensenich Wood propeller. The model is W68T2ET-70J and is made by two wooden blades, with fixed pitch. The diameter is 1730mm.

7.3 FUEL SYSTEM

A sketch of the fuel system is given in Figure 7-15. It consists of two fuel tanks integrated in the wing leading edge and having a 45t (11.8 US gal) capacity (total capacity is 90lt (23.7 US gal)). The engine is fed by means of an engine-driven mechanical pump and, as backup, by an electric pump. The fuel system has a sediment bowl or chamber that is accessible for drainage.

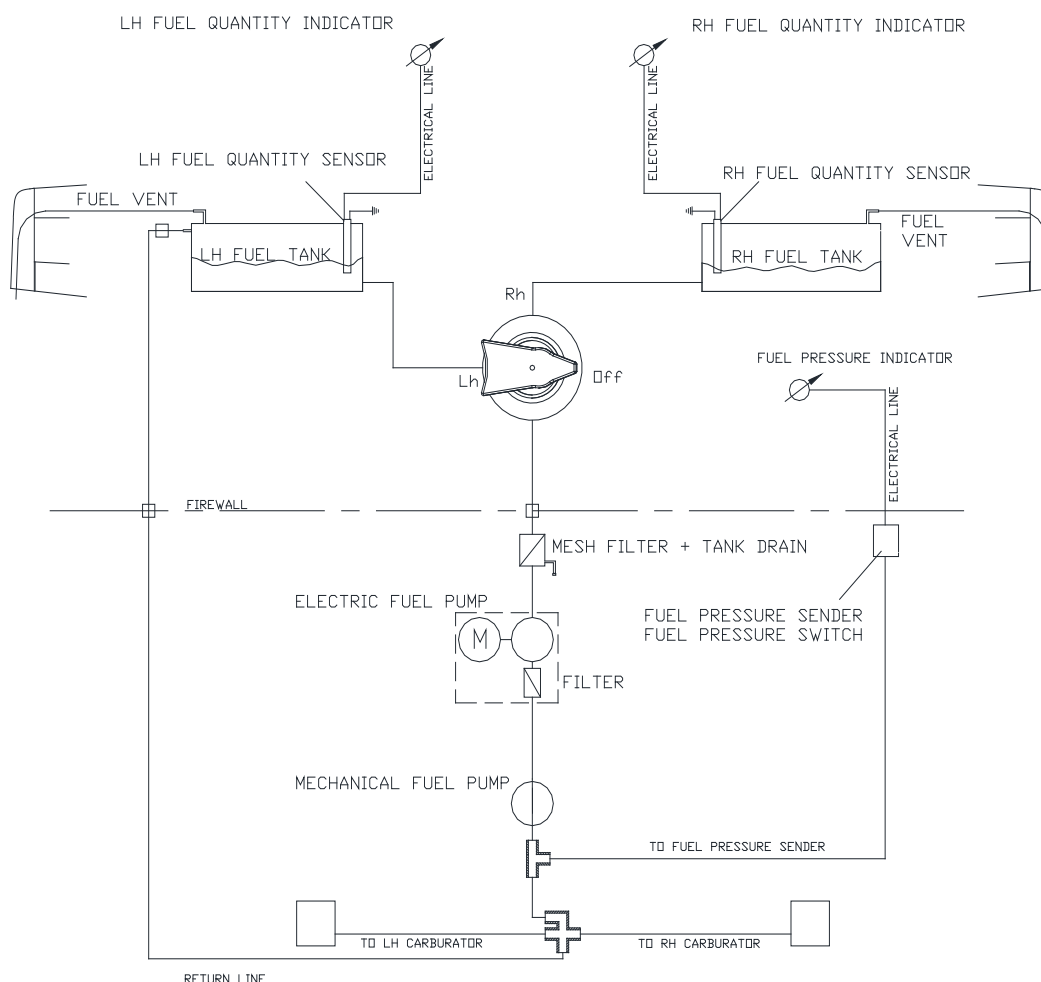


Fig. 7-15. Fuel System

A fuel selector is located in cabin. Two resistive type fuel quantity senders are installed in each tank and provide the fuel indication on the A/C cockpit.

8 LUGGAGE COMPARTMENT

The Luggage compartment is located behind the pilots' seats. Luggage shall be uniformly distributed on utility shelf and its weight shall not exceed 20kg.



*Before loading luggage, check aircraft's weight and CG location
(see Sect. 6)*

9 DOORS

Two doors are provided for P92 Echo MkII, on pilot and co-pilot side. Given that the propeller is located on the nose of the aircraft, there are no chances to endanger person using those exits.

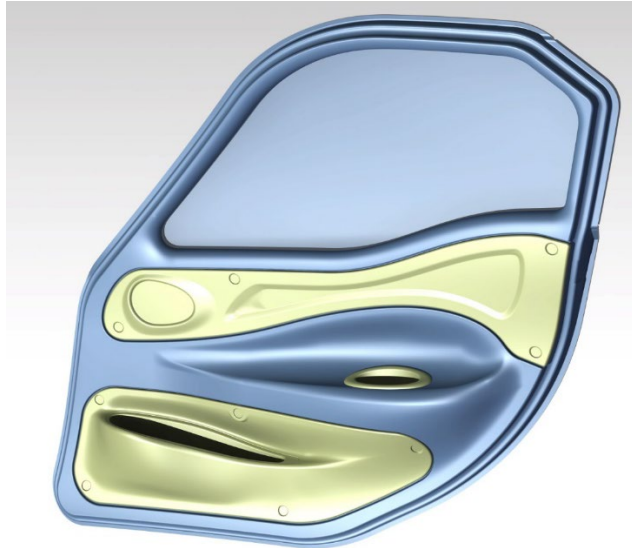


Fig. 7-16. P92 Echo MkII Door

Doors are also considered as emergency exits.

10 SEATS

Pilot and co-pilot seats are characterized by aluminium structure (Al 6061) manufactured by Tecnam. It is covered by a cushion and connected to the fuselage structure.

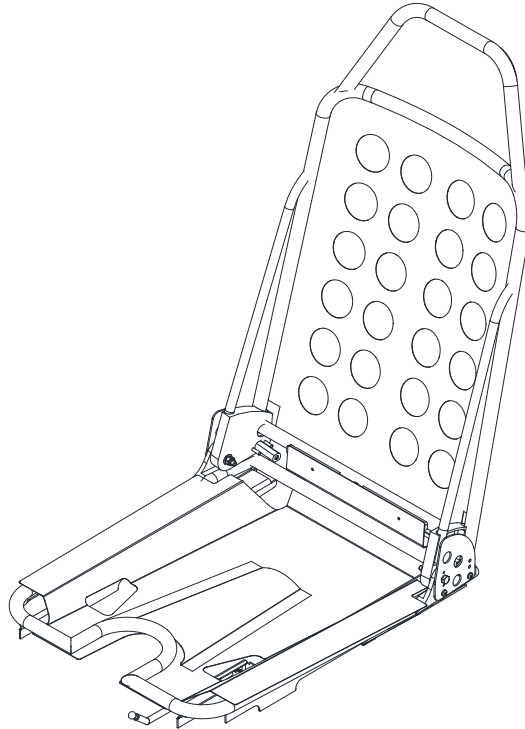


Fig. 7-17. P92 Echo MkII Seat Structure

11 RESCUE SYSTEM

The P92 Echo MkII high wing aeroplanes hang under the parachute by means of four bridles. The front fitting points are dedicated fixations points near the front attachments of the wing. The rear two fitting points are located by the connection between fuselage and the rear wing attachments. The parachute could be a BRS-6-1050, manufactured by BRS aerospace, or a GALAXY GRS SD Speedy model, manufactured by Galaxy.

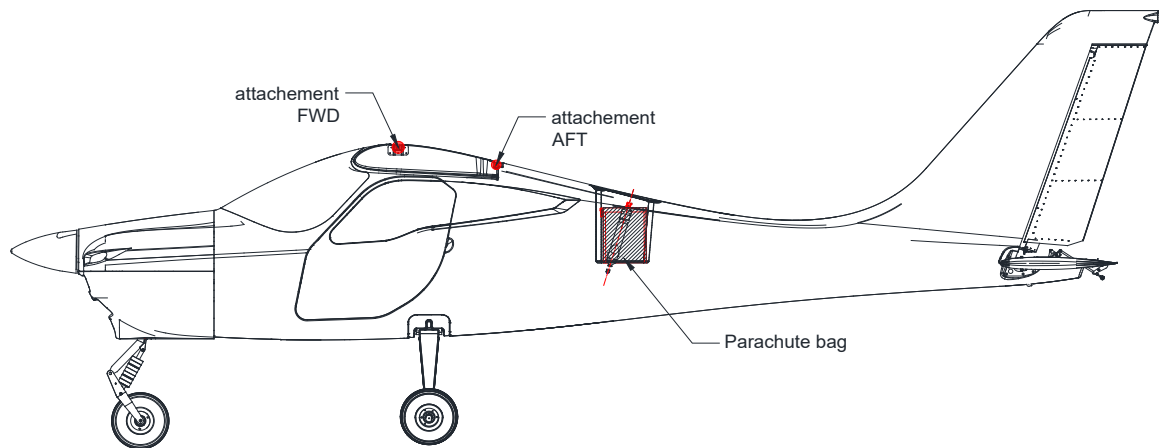


Fig. 7-16. P92 Echo MkII Rescue system

INTENTIONALLY LEFT BLANK

SEZIONE 8 – AIRCRAFT CARE AND MAINTENANCE

INDEX

1. Introduction	2
2. Aircraft Inspection Intervals.....	3
3. Aircraft Changes or Repairs.....	4
4. Ground Handling.....	5
4.1. Towing	5
4.2. Parking and Tie-Down	5
4.3. Jacking	5
4.4. Leveling	5
4.5. Road Transport.....	5
5. Cleaning And Care.....	6

1. Introduction

This section contains factory-recommended procedures for proper ground handling and routine care and servicing. It also identifies certain inspection and maintenance requirements, which must be followed if the aircraft is to retain its new-plane performance and dependability. It is recommended to follow a planned schedule of lubrication and preventive maintenance based on climatic and flying conditions encountered locally.

2. Aircraft Inspection Intervals

Correct maintenance procedures are described in the aircraft's Maintenance Manual or in the engine's Maintenance Manual.

3. Aircraft Changes or Repairs

Aircraft changes or repairs must be performed in accordance with Aircraft Maintenance Manual and only by TECNAM authorized personnel.

4. Ground Handling

4.1. TOWING

The aircraft is most easily and safely maneuvered by pulling it by its propeller near the axle. Aircraft may be steered by turning rudder or, for steep turns, by pushing lightly on tailcone to lift nose wheel.

4.2. PARKING AND TIE-DOWN

When parking airplane outdoors, head it into the wind and set the parking brake. If chocks or wedges are available it is preferable to use the latter. In severe weather and high wind conditions it is wise to tie the airplane down. Tie-down ropes shall be fastened to the lug present on the wing's lower surface. Nose gear fork can be used for front tie-down location. Flight controls shall be secured to avoid possible weather vaning damage to moving surfaces.

4.3. JACKING

Given the light empty weight of the aircraft, lifting one of the main wheels can easily be accomplished even without the use of hydraulic jacks. For an acceptable procedure please refer to the Maintenance Manual.

4.4. LEVELING

Aircraft levelling may become necessary to check wing incidence, dihedral or the exact location of CG. Longitudinal levelling verification is obtained placing a level between the front and aft seat's supporting trusses (slide off the seats to get the access to the two trusses).

4.5. ROAD TRANSPORT

It is recommended to secure tightly all aircraft components onto the cart to avoid damage during transport. It is suggested to place wings under the aircraft's bottom, secured by specific clamps. Secondary components like the stabilator shall be protected from accidental hits using plastic or other material. For correct rigging and de-rigging procedure, refer to the Maintenance Manual.

5. Cleaning And Care

To clean painted surfaces, use a mild detergent such as shampoo normally used for car finish; use a soft cloth for drying. The plastic windshield and windows should never be dusted when dry; use lukewarm soapy water and dry using chamois only. It is possible to use special glass detergents but, in any case, never use products such as gasoline, alcohol, acetone or other solvents. To clean cabin interior, seats, upholstery and carpet, it is generally recommended to use foam-type detergents.

SECTION 9 – AFM Supplements

INDEX

1. Introduction.....	2
2. Supplements list.....	3

1. INTRODUCTION

This Section concerns the supplemental manuals of additional (or optional) instrumentation equipping the ***P92 Echo MKII*** and/or information and limitations related to installed equipment configuration or needed to fit local national rules.

2. SUPPLEMENTS LIST

Aircraft S/N:		Registration marks:		Date:	
SUPPLEMENTS LIST FOR <i>P92 Echo MKII</i>					
Sup. No.	Title	Rev. no.	Date	APPLICABLE:	
				YES	NO
S1	MTV-33 Variable Pitch Propeller	0	06/03/2023	<input type="checkbox"/>	<input type="checkbox"/>
S2	Sensenich 3 Blades – Fixed Pitch Propeller	0	06/03/2023	<input type="checkbox"/>	<input type="checkbox"/>
S3	E-Props 3 Blades – Fixed Pitch Propeller	0	06/03/2023	<input type="checkbox"/>	<input type="checkbox"/>

INTENTIONALLY LEFT BLANK

Supplement no. S01**MTV – 33 Variable Pitch Propeller****Record of Revisions**

Rev	Revised page	Description of Revision
0	-	MTOW Increment

List of Effective Pages

	Page	Revision
Cover pages	All	Rev 0
Section 1	All	Rev 0
Section 2	All	Rev 0
Section 3	All	Rev 0
Section 4	All	Rev 0
Section 5	All	Rev 0
Section 6	All	Rev 0
Section 7	All	Rev 0
Section 8	All	Rev 0

INDEX

INDEX	2
INTRODUCTION	3
Section 1 – GENERAL	5
Section 2 – LIMITATIONS	7
Section 3 – EMERGENCY PROCEDURES.....	9
Section 4 – NORMAL PROCEDURES	11
Section 5 – PERFORMANCE	13
Section 6 – WEIGHT AND BALANCE	15
Section 7 – AIRFRAME AND SYSTEMS DESCRIPTION	17
Section 8 – AIRCRAFT CARE AND MAINTENANCE	19

INTRODUCTION

This section contains supplemental information to operate the aircraft in a safe and efficient manner when equipped with MTV-33 Variable Pitch Propeller.

It is the owner's responsibility to replace the mentioned pages in accordance with the instructions herein addressed section by section.

INTENTIONALLY LEFT BLANK

Supplement S01: pages replacement instructions

SECTION 1 – GENERAL

According A/C configuration apply following pages replacement:

Supplement S01 pages		Basic AFM pages
MTVPP1-5	REPLACES	1-5

INTENTIONALLY LEFT BLANK

3 GENERAL FEATURES

3.1 CONTROL SURFACES TRAVEL LIMITS

The control surfaces travel limits are reported in the Aircraft Maintenance Manual.

3.2 ENGINE

Manufacturer	Bombardier-Rotax GmbH
Model	912 S3
Type Certificate	EASA TCDS no. E.121 dated 1 April 2008
Engine Type	4 cylinders horizontally opposed with 1352 c.c. of overall displacement, liquid cooled cylinder heads, ram-air cooled cylinders, two carburetors, integrated reduction gear box with torsional shock absorber and overload clutch.
Maximum power (at declared rpm)	73.5 kW (98.6hp) @ 5800 rpm –5 minutes maximum. 69.0 kW (92.5hp) @ 5500 rpm (continuous)

3.3 PROPELLER

Manufacturer	MT Propeller
Model	MTV-33-1-A/175-200
Number of blades	2
Diameter	1780 mm (no reduction permitted)
Type	Variable pitch
Reduction ratio (crank to propeller shaft)	2.43:1

3.4 GOVERNOR

Manufacturer	MT Propeller
Model	P-850-12UL
Type	Hydraulic

Supplement S01: pages replacement instructions

SECTION 2 – LIMITATIONS

According A/C configuration apply following pages replacement:

Supplement S01 pages		Basic AFM pages
MTVPP2-5	REPLACES	2-5
MTVPP2-7	REPLACES	2-7

INTENTIONALLY LEFT BLANK

4 POWERPLANT LIMITATIONS

Following table reports the operating limitations for aircraft engine installed:

ENGINE MANUFACTURER: Bombardier Rotax GmbH.

ENGINE MODEL: 912 S3

MAXIMUM POWER:

	Max Power kW (hp)	Max RPM. Prop. RPM (engine)	Time max. (minutes)
Max. T.O.	73.5 (98.5)	2388 (5800)	5
Max. Cont.	69 (92.5)	2265 (5500)	-

NOTE

With full throttle, at fixed point in no wind conditions, the maximum propeller's Rpm should be 5100 ± 250 .

Temperatures:

Max CHT*	135°C
Max CT:	120°C
Min/Max Oil:	50 °C / 130 °C
Oil normal operating range (approx.):	90 °C / 110 °C

* *applicable for Engines up to serial no. 4924543(included) and repaired engine which doesn't change the cylinder head n°3 with new one (part no. 413195)*

Oil Pressure:

Minimum:	0.8 Bar / 12 psi
Normal:	2-5 Bar / 29-73 psi
Maximum:	7 Bar / 102 psi

Engine starting: allowable temperature range

OAT Min	-25° C
OAT Max	+50° C



WARNING

In event of cold starting operation, it is permitted a maximum oil pressure of 7 bar for a short period.

Fuel pressure:

Minimum:	2.2 psi (0.15 Bar)
Normal:	5.8 psi (0.40 Bar) or 7.26 psi* (0.5 Bar)

* only applicable for fuel pump part no. 893110, 893114 and 893115

7 PROPELLER

Manufacturer	MT Propeller
Model	MTV-33-1-A/175-200
Number of blades	2
Diameter	1780 mm (no reduction permitted)
Type	Variable pitch

Supplement S01: pages replacement instructions

SECTION 3 – EMERGENCY PROCEDURES

According A/C configuration apply following pages replacement:

Supplement S01 pages		Basic AFM pages
MTVPP3-10	REPLACES	3-10
MTVPP3-11	REPLACES	3-11

INTENTIONALLY LEFT BLANK

4.3.4 CHT/CT limit exceedance

If CHT is above 135°C or CT is above 120°C:

1. Throttle Lever REDUCE *Minimum practical*
2. **Land as soon as practical**

If CHT /CT continues to rise and engine shows roughness or power loss:

3. **Land as soon as possible** applying forced landing procedure (See Para.7)

4.4 Propeller Overspeeding

1. Throttle Lever REDUCE power to minimum practical
2. Propeller Lever REDUCE as practical
3. Rpm indicator CHECK

If it is not possible to decrease rpm, land as soon as possible applying *Forced landing* procedure.



Maximum rpm exceedance may cause engine components damage. Propeller and engine shall be inspected in accordance with related Operators Manuals.

Monitor RPM; overspeed shall be prevented by retarding propeller lever.

If it is not possible to decrease rpm, land as soon as possible.

4.5 Defective Propeller Lever Control Cable

If power is sufficient to continue flight:

1. Approach nearest airfield, control engine power with throttle
2. Perform normal landing.



Go-around may then be impossible.

If power is not sufficient to continue flight, apply Forced Landing Checklist.

5. IN-FLIGHT ENGINE RESTART



WARNING

After a mechanical engine seizure, fire or a major propeller damage engine restart is not recommended.

- | | |
|-----------------------------|------------------------------|
| 1. Master Switch: | CHECK ON |
| 2. Fuel quantity indicator: | CHECK |
| 3. Throttle lever: | $\approx 75\%$ |
| 4. Propeller Lever: | FULL FORWARD |
| 5. Electric Fuel pump: | ON |
| 6. Fuel Selector: | Change the fuel feeding tank |
| 7. Carburetor heat: | ON |
| 8. Magnetos: | BOTH |
| 9. Magnetos: | START |



CAUTION

After engine restart, if practical, moderate engine rpm and throttle increase to allow OIL and CHT/CT temperatures for stabilizing in the green arcs.

In case of unsuccessful engine restart:

1. Engine: SECURE (see engine securing procedure on Para. 3)
2. **Land as soon as possible** applying forced landing procedure (See Para. 7)

Supplement S01: pages replacement instructions

SECTION 4 – NORMAL PROCEDURES

According A/C configuration apply following pages replacement:

Supplement S01 pages		Basic AFM pages
MTVPP4-7 THRU 10	REPLACES	4-7 THRU 10

INTENTIONALLY LEFT BLANK

3.2 ENGINE STARTING

1. Master switch *ON*.
2. Engine throttle: *idle*
3. *Propeller Lever: FULL FORWARD*
4. Choke: *as needed*
5. Fuel selector valve: *select the tank with less fuel*
6. Electric fuel pump: *ON*
7. Propeller area: *call for CLEAR and visually check*



Check to insure no person or object is present in the area close to the propeller. Forward lower sector visibility is not possible from inside the cockpit.

8. Magnetos: *BOTH*
9. Magnetos: *START*
10. Check oil pressure rise within 10 sec. (maximum cold value 7 bar)
11. Generator switch “ON”
12. Check *ALT* message disappears.
13. Voltmeter: check more than 14V
14. Engine parameters: Check
15. Choke: *OFF*
16. Throttle lever: *2500 (1000) Rpm*
17. Electric fuel pump: *OFF*
18. Check fuel pressure (min 2.2 psi)

3.3 BEFORE TAXIING

1. Radio and Avionics: *ON*
2. Altimeter: *set*
3. Direction indicator: *set in accordance with the magnetic compass*
4. Parking brake: *OFF and taxi*

3.4 TAXIING

1. Brakes: *check*
2. Steering: *check*
3. Flight parameters: *check operation*

3.5 PRIOR TO TAKE-OFF

1. Parking brake: *ON, brake pedal press / brake lever pull*
2. Engine parameters: *Check within limits*
 - Oil pressure: 2-5 bar (*above 3400 (1400) rpm*); 0.8 bar (*below 3400 (1400) rpm*)
3. Ammeter check: *“green”*.
4. Electric Fuel pump: *ON*
5. Fuel valve: *select the fullest tank*
6. Fuel pressure: *check*
7. *Propeller Lever FULL FORWARD*
8. Throttle lever: *advance to 4000 (1700) rpm*
 - a. Ignition magnetos test: *select LEFT, check Rpm drop within 300 (130) rpm;*
 - b. Select BOTH: *check 4000 (1700) rpm;*
 - c. Select RIGHT: *check Rpm drop within 300 (130) rpm;*
 - d. *Maximum difference of speed between LEFT and RIGHT 115 (50) rpm,*
 - e. Select BOTH: *check 4000 (1700) rpm.*
9. Propeller lever : Maximum to minimum travel or three times and check:
 - a. MAP increasing
 - b. Rpm decreasing
 - c. Oil pressure surge
 - d. Rpm restored with prop lever at full forward position.
10. Flaps: *set T/O*
11. Pitch trim: *check neutral*
12. Flight controls: *check free*
13. Seat belts: *checked fastened*

3.6 TAKE-OFF AND CLIMB



On uncontrolled fields, before line up, check runway wind direction and speed and check for traffic on final

1. Parking brake: *OFF*
2. Propeller lever: *Full forward*
3. Throttle lever: *Full Forward*
4. Engine parameters: *check*
5. Rotation at V_R :

		MTOW 472.5 kg	MTOW 600 kg
Rotation (V_R)	Speed	77 km/h / 41 kts IAS	83 km/h / 45 kts IAS

*) applicable for aircraft authorized according to DM503 10/12/2021

At safe altitude:

6. Flaps: retract
7. Fuel pressure: check green arc
8. Throttle: Reduce MAP as required.
9. Propeller lever: reduce at or below 5500 (2265) Rpm
10. Electric Fuel Pump : OFF

Take-off into crosswind is performed with the flaps normally set at 15° (T/O).

With the ailerons deflected into the wind, accelerate the airplane to a speed slightly higher than normal while decreasing the aileron deflection as speed increases then - with authority - rotate to prevent possible settling back to the runway while drifting. When clear of the ground, make a coordinated turn into the wind to correct for drift.



Maximum take off power must be limited to 5 minutes. Reduce Throttles MAP power before retracting Propeller lever to 5500 (2265) Rpm or below.

3.7 CRUISE

1. Throttle: BELOW(Max MAP 27 in.HG)
2. Propeller lever: Set to 4600-5500 (1900-2265) Rpm
3. Check engine parameters within limits

**CAUTION**

MAP reduction should be performed before propeller lever retraction. Conversely, Rpm increase should be set before throttle lever is advanced.

3.8 BEFORE LANDING

1. Electric fuel pump: *ON*
2. Fuel valve: select the fullest tank
3. Landing Light (*if applicable*): *ON*
4. On downwind, leg abeam touch down point: **Flaps set T/O**
5. Propeller lever: FULL FORWARD
6. On final leg: **Flaps set Land, Final Approach Speed:** 85 km/h (46 kts) IAS
93 km/h (50 kts) IAS*
7. Optimal touchdown speed: 75 km/h (40 kts) IAS (MTOW 472.5 kg)
80 km/h (43 kts) IAS (MTOW 600 kg)*

*) applicable for aircraft authorized according to DM503 10/12/21

Normal crosswind landings are made with full flaps. Avoid prolonged slips. Increase airspeed depending on wind intensity and direction as required above normal approach and landing speeds to accommodate increased stall speed when side slip is added. After touchdown, hold a straight course with rudder and brakes as required. The maximum allowable crosswind velocity is dependent upon pilot capability as well as aircraft limitations(refer to Sec 2).

NOTE

3.9 BALKED LANDING

1. Throttle lever: Full Forward
2. Attitude: attain climb speed
3. Flaps position: retract to *TO* as practical
4. Electric fuel pump: *ON*

3.10 AFTER LANDING

1. Flaps: *UP*
2. Electric Fuel Pump: *OFF*
3. Landing light (*if installed*): *OFF*

Supplement S01: pages replacement instructions

SECTION 5 – PERFORMANCE

According A/C configuration apply following pages replacement:

Supplement S01 pages		Basic AFM pages
MTVPP5-8 THRU 11	REPLACES	5-8 THRU 11

INTENTIONALLY LEFT BLANK

7 TAKE-OFF PERFORMANCE

Weight = 600 kg*						
Flaps: T/O Speed at Lift-Off = 45 KIAS Throttle Lever: Full Forward Runway: Grass		Corrections				
		Headwind: - 2.5m for each kt (8 ft/kt)				
		Tailwind: + 10m for each kt (33ft/kt)				
		Paved Runway: - 6% to Ground Roll				
		Runway slope: + 5% to Ground Roll for each +1%				
Pressure Altitude		Distance [m]				
		Temperature [°C]				ISA
[ft]		-25	0	25	50	
S.L.	Ground Roll	60	98	192	242	124
	At 50 ft AGL	211	276	349	431	319
1000	Ground Roll	123	165	213	267	190
	At 50 ft AGL	234	305	384	473	345
2000	Ground Roll	138	184	237	297	207
	At 50 ft AGL	259	336	423	523	373
3000	Ground Roll	154	205	262	337	225
	At 50 ft AGL	286	370	465	589	403
4000	Ground Roll	173	228	291	382	245
	At 50 ft AGL	317	408	511	662	436
5000	Ground Roll	192	253	330	432	266
	At 50 ft AGL	350	449	577	744	471
6000	Ground Roll	214	280	375	488	289
	At 50 ft AGL	386	495	650	835	509
7000	Ground Roll	239	317	425	550	321
	At 50 ft AGL	426	555	732	937	562
8000	Ground Roll	265	360	481	621	357
	At 50 ft AGL	470	627	824	1051	621
9000	Ground Roll	296	409	543	699	396
	At 50 ft AGL	521	707	926	1179	685
10000	Ground Roll	338	465	614	788	438
	At 50 ft AGL	590	797	1040	1321	755

*) applicable for aircraft authorized according to DM503 12/10/2021

Weight = 450 kg
Flaps: T/O
Speed at Lift-Off = 41 KIAS
Throttle Lever: Full Forward
Runway: Grass
Corrections
Headwind: - 2.5m for each kt (8 ft/kt)
Tailwind: + 10m for each kt (33ft/kt)
Paved Runway: - 6% to Ground Roll
Runway slope: + 5% to Ground Roll for each +1%

Pressure Altitude		Distance [m]				ISA
		Temperature [°C]				
[ft]		-25	0	25	50	
S.L.	Ground Roll	35	50	95	188	70
	At 50 ft AGL	75	110	175	257	145
1000	Ground Roll	80	111	159	213	136
	At 50 ft AGL	100	140	210	299	171
2000	Ground Roll	90	130	183	243	153
	At 50 ft AGL	110	162	249	349	199
3000	Ground Roll	100	151	208	283	171
	At 50 ft AGL	118	196	291	415	229
4000	Ground Roll	119	174	237	328	191
	At 50 ft AGL	143	234	337	488	262
5000	Ground Roll	138	199	276	378	212
	At 50 ft AGL	176	275	403	570	297
6000	Ground Roll	160	226	321	434	235
	At 50 ft AGL	212	321	476	661	335
7000	Ground Roll	185	263	371	496	267
	At 50 ft AGL	252	381	558	763	388
8000	Ground Roll	211	306	427	567	303
	At 50 ft AGL	296	453	650	877	447
9000	Ground Roll	242	355	489	645	342
	At 50 ft AGL	347	533	752	1005	511
10000	Ground Roll	284	411	560	734	384
	At 50 ft AGL	416	623	866	1147	581

8 RATE OF CLIMB

Throttle lever: Full forward Flaps: Up V_Y = 65 KIAS V_X = 62 KIAS						
Weight [kg]	Pressure Altitude [ft]	Rate of Climb [ft/min] at V _Y				
		Temperature [°C]				ISA
		-25	0	25	50	
600*	S.L.	1318	1085	876	689	957
	2000	1214	981	776	596	878
	4000	1135	902	697	517	800
	6000	1057	824	619	439	721
	8000	978	745	540	360	642
	10000	899	666	461	281	564
450	S.L.	1557	1324	1116	929	1220
	2000	1475	1242	1041	861	1141
	4000	1396	1163	962	782	1063
	6000	1318	1085	884	704	984
	8000	1239	1006	805	625	905
	10000	1160	927	726	546	827

*) applicable for aircraft authorized according to DM503 12/10/2021

9 CRUISE PERFORMANCE

Pressure altitude H_p :

0 ft OAT: +15°C

Engine RPM	Manifold Pressure (in.Hg)	Speed TAS [km/h]	Speed TAS [kts]	Consumption (lt/h)
4300	24	161	87	13
4800	26	193	104	18
5000	26	200	108	20
5500	27	206	111	25
5800	27.5	213	115	27

SECTION 6 – WEIGHT AND BALANCE

Refer to the basic AFM, Section 6 – WEIGHT AND BALANCE

INTENTIONALLY LEFT BLANK

SECTION 7 – AIRFRAME AND SYSTEMS DESCRIPTION

Refer to the basic AFM, Section 7 – AIRFRAME AND SYSTEMS DESCRIPTION

INTENTIONALLY LEFT BLANK

SECTION 8 – AIRCRAFT CARE AND MAINTENANCE

Refer to the basic AFM, Section 8 – AIRCRAFT CARE AND MAINTENANCE

INTENTIONALLY LEFT BLANK

Supplement no. S02

Sensenich 3 Blades– Fixed Pitch Propeller

Record of Revisions

Rev	Revised page	Description of Revision
0	-	MTOW Increment

List of Effective Pages

	Page	Revision
Cover pages	All	Rev.0
Section 1	All	Rev 0
Section 2	All	Rev 0
Section 3	All	Rev 0
Section 4	All	Rev 0
Section 5	All	Rev 0
Section 6	All	Rev 0
Section 7	All	Rev 0
Section 8	All	Rev 0

INDEX

INDEX	2
INTRODUCTION	3
Section 1 – GENERAL	5
Section 2 – LIMITATIONS	7
Section 3 – EMERGENCY PROCEDURES.....	9
Section 4 – NORMAL PROCEDURES	11
Section 5 – PERFORMANCE	13
Section 6 – WEIGHT AND BALANCE	15
Section 7 – AIRFRAME AND SYSTEMS DESCRIPTION	17
Section 8 – AIRCRAFT CARE AND MAINTENANCE	19

INTRODUCTION

This section contains supplemental information to operate the aircraft in a safe and efficient manner when equipped with Sensenich 3B0R5/R68C Fixed Pitch Propeller.

It is the owner's responsibility to replace the mentioned pages in accordance with the instructions herein addressed section by section.

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 1 – GENERAL

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SFPP1-5	REPLACES	1-5

INTENTIONALLY LEFT BLANK

3 GENERAL FEATURES

3.1 CONTROL SURFACES TRAVEL LIMITS

The control surfaces travel limits are reported in the Aircraft Maintenance Manual.

3.2 ENGINE

Manufacturer	Bombardier Rotax GmbH
Model	912 ULS2
Engine type	4 cylinder horizontally-opposed twins with overall displacement of 1352 c.c., mixed cooling, (water-cooled heads and air-cooled cylinders), twin carburetors, integrated reduction gear with torque damper.
Maximum power (at declared rpm)	73.5kW (98.5hp) @5800rpm (max.5') 69.0kW (92.5hp) @5500rpm (cont.)

3.3 PROPELLER

Manufacturer	Sensenich
Model	3B0R5/R68C
Number of blades	3
Diameter	1730 mm (no reduction permitted)
Type	Fixed - ground adjustable pitch
Reduction ratio (crank to propeller shaft)	2.43:1

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 2 – LIMITATIONS

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SFPP2-7	REPLACES	2-7

7 PROPELLER

Manufacturer	Sensenich
Model	3B0R5/R68C
Number of blades	3
Diameter	1730 mm (No Reduction Permitted)
Type	Fixed - ground adjustable pitch

SECTION 3 – EMERGENCY PROCEDURES

Refer to the basic AFM, Section 3 – EMERGENCY PROCEDURES

INTENTIONALLY LEFT BLANK

SECTION 4 – NORMAL PROCEDURES

Refer to the basic AFM, Section 4 – NORMAL PROCEDURES

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 5 – PERFORMANCE

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SFPP5-9 THRU 10	REPLACES	5-9 THRU 10

INTENTIONALLY LEFT BLANK

7 RATE OF CLIMB

Throttle lever: Full forward Flaps: Up V_Y = 65 KIAS V_X = 62 KIAS						
Weight [kg]	Pressure Altitude [ft]	Rate of Climb [ft/min] at V _Y				
		Temperature [°C]				ISA
		-25	0	25	50	
600*	S.L.	1318	1085	876	689	957
	2000	1118	885	676	489	757
	4000	918	685	476	289	557
	6000	718	485	276	89	357
	8000	518	285	76	-111	157
	10000	318	85	-124	-311	-43
450	S.L.	1619	1386	1182	1002	1280
	2000	1419	1186	982	802	1080
	4000	1219	986	782	602	880
	6000	1019	786	582	402	680
	8000	819	586	382	202	480
	10000	619	386	182	2	280

8 CRUISE PERFORMANCE

Pressure altitude H_p :

0 ft OAT: +15°C

Engine RPM	Speed TAS [km/h]	Speed TAS [kts]	Consumption (lt/h)
4300	154	83	14
4800	181	98	18
5200	185	100	21

SECTION 6 – WEIGHT AND BALANCE

Refer to the basic AFM, Section 6 – WEIGHT AND BALANCE

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 7 – AIRFRAME AND SYSTEMS DESCRIPTION

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SFPP7 - 12	REPLACES	7-12

7. POWERPLANT

7.1. ENGINE

P92 Echo MkII is equipped with a Rotax 912 ULS 2 100 horse powered engine.



Fig. 7-14. Rotax 912 ULS 2 engine

The main engine characteristics are:

- 4 stroke, 4 cylinders. horizontally opposed, spark ignition engine, single central camshaft hydraulic tappets - push rods – OHV;
- Liquid cooled cylinder heads;
- Ram air cooled cylinders;
- Dry sump forced lubrication;
- Dual ignition of breakerless, capacitor discharge design;
- 2 constant depression carburettors;
- Mechanical fuel pumps;
- Electric starter 12 V 0.9 kW;
- Integrated AC generator with external rectifier regulator;
- Propeller drive via integrated gearbox with mechanical shock absorber and overload clutch.

7.2 PROPELLER

P92 Echo MkII is equipped with a Sensenich Wood propeller. The model is 3B0R5/R68C and is made by 3 wooden blades, with fixed- ground adjustable pitch. The diameter is 1730mm.

SECTION 8 – AIRCRAFT CARE AND MAINTENANCE

Refer to the basic AFM, Section 8 – AIRCRAFT CARE AND MAINTENANCE

Supplement no. S03

E-Props 3 Blades– Fixed Pitch Propeller

Record of Revisions

Rev	Revised page	Description of Revision
0	-	MTOW Increment

List of Effective Pages

	Page	Revision
Cover pages	All	<i>Rev.0</i>
Section 1	All	<i>Rev 0</i>
Section 2	All	<i>Rev 0</i>
Section 3	All	<i>Rev 0</i>
Section 4	All	<i>Rev 0</i>
Section 5	All	<i>Rev 0</i>
Section 6	All	<i>Rev 0</i>
Section 7	All	<i>Rev 0</i>
Section 8	All	<i>Rev 0</i>

INDEX

INDEX	2
INTRODUCTION	3
Section 1 – GENERAL	5
Section 2 – LIMITATIONS	7
Section 3 – EMERGENCY PROCEDURES.....	9
Section 4 – NORMAL PROCEDURES	11
Section 5 – PERFORMANCE	13
Section 6 – WEIGHT AND BALANCE	15
Section 7 – AIRFRAME AND SYSTEMS DESCRIPTION	17
Section 8 – AIRCRAFT CARE AND MAINTENANCE	19

INTRODUCTION

This section contains supplemental information to operate the aircraft in a safe and efficient manner when equipped with E-Props DUR-3-170-C4-T Fixed Pitch Propeller.

It is the owner's responsibility to replace the mentioned pages in accordance with the instructions herein addressed section by section.

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 1 – GENERAL

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SEPFPP1-5	REPLACES	1-5

INTENTIONALLY LEFT BLANK

3 GENERAL FEATURES

3.1 CONTROL SURFACES TRAVEL LIMITS

The control surfaces travel limits are reported in the Aircraft Maintenance Manual.

3.2 ENGINE

Manufacturer	Bombardier Rotax GmbH
Model	912 ULS2
Engine type	4 cylinder horizontally-opposed twins with overall displacement of 1352 c.c., mixed cooling, (water-cooled heads and air-cooled cylinders), twin carburetors, integrated reduction gear with torque damper.
Maximum power (at declared rpm)	73.5kW (98.5hp) @5800rpm (max.5') 69.0kW (92.5hp) @5500rpm (cont.)

3.3 PROPELLER

Manufacturer	E-Props
Model	DUR-3-170-C4-T
Number of blades	3
Diameter	1700 mm (no reduction permitted)
Type	Fixed - ground adjustable pitch
Reduction ratio (crank to propeller shaft)	2.43:1

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 2 – LIMITATIONS

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SEPFPP2-7	REPLACES	2-7

7 PROPELLER

Manufacturer	E-Props
Model	DUR-3-170-C4-T
Number of blades	3
Diameter	1730 mm (No Reduction Permitted)
Type	Fixed - ground adjustable pitch

SECTION 3 – EMERGENCY PROCEDURES

Refer to the basic AFM, Section 3 – EMERGENCY PROCEDURES

INTENTIONALLY LEFT BLANK

SECTION 4 – NORMAL PROCEDURES

Refer to the basic AFM, Section 4 – NORMAL PROCEDURES

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 5 – PERFORMANCE

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SEPFPP5-9 THRU 10	REPLACES	5-9 THRU 10

INTENTIONALLY LEFT BLANK

7 RATE OF CLIMB

Throttle lever: Full forward Flaps: Up V_Y = 65 KIAS V_X = 62 KIAS						
Weight [kg]	Pressure Altitude [ft]	Rate of Climb [ft/min] at V _Y				
		Temperature [°C]				ISA
		-25	0	25	50	
600*	S.L.	1318	1085	876	689	957
	2000	1118	885	676	489	757
	4000	918	685	476	289	557
	6000	718	485	276	89	357
	8000	518	285	76	-111	157
	10000	318	85	-124	-311	-43
450	S.L.	1619	1386	1182	1002	1280
	2000	1419	1186	982	802	1080
	4000	1219	986	782	602	880
	6000	1019	786	582	402	680
	8000	819	586	382	202	480
	10000	619	386	182	2	280

8 CRUISE PERFORMANCE

Pressure altitude H_p : **2000 ft** *OAT:* **+13°C**

Engine RPM	Speed TAS [km/h]	Speed TAS [kts]	Consumption (lt/h)
4300	152	82	14
4800	180	97	18
5200	198	107	21

Pressure altitude H_p : **4000 ft** *OAT:* **+11°C**

Engine RPM	Speed TAS [km/h]	Speed TAS [kts]	Consumption (lt/h)
4300	156	84	14
4800	183	99	18
5200	202	109	21

SECTION 6 – WEIGHT AND BALANCE

Refer to the basic AFM, Section 6 – WEIGHT AND BALANCE

INTENTIONALLY LEFT BLANK

Supplement S02: pages replacement instructions

SECTION 7 – AIRFRAME AND SYSTEMS DESCRIPTION

According A/C configuration apply following pages replacement:

Supplement S02 pages		Basic AFM pages
SEPFPP7 - 12	REPLACES	7-12

7. POWERPLANT

7.1. ENGINE

P92 Echo MkII is equipped with a Rotax 912 ULS 2 100 horse powered engine.



Fig. 7-14. Rotax 912 ULS 2 engine

The main engine characteristics are:

- 4 stroke, 4 cylinders. horizontally opposed, spark ignition engine, single central camshaft hydraulic tappets - push rods – OHV;
- Liquid cooled cylinder heads;
- Ram air cooled cylinders;
- Dry sump forced lubrication;
- Dual ignition of breakerless, capacitor discharge design;
- 2 constant depression carburetors;
- Mechanical fuel pumps;
- Electric starter 12 V 0.9 kW;
- Integrated AC generator with external rectifier regulator;
- Propeller drive via integrated gearbox with mechanical shock absorber and overload clutch.

7.2 PROPELLER

P92 Echo MkII is equipped with a E-Props 3 blades propeller. The model is DUR-3-170-C4-T, with fixed- ground adjustable pitch. The diameter is 1700 mm.

SECTION 8 – AIRCRAFT CARE AND MAINTENANCE

Refer to the basic AFM, Section 8 – AIRCRAFT CARE AND MAINTENANCE